

# GRAVITY

GRAVITY is the new magnetic system of FLEX collection. A versatile and distinctive galaxy of graphic elements capable of enhancing any environment and providing a focal lighting effect. Installed magnetically with a mechanical extra security feature. Offered for trimless, ceiling and pendant mounting, linear units use a 48V power supply and allow the integration of multiple solutions, installed through magnetic and mechanical fixing, meeting different interior needs. Adjustable spots emphasise any setting due to maximum flexibility and the anti-glare retracted lens for accent or diffuse lighting. Linear modules are proposed with an opal screen for homogeneous and welcoming lighting. For high visual comfort and optimal glare control over the entire surface, the system is completed by UGR<19 units: recessed or fold, respectively for direct or adjustable light emission. GRAVITY can be installed individually or in multiple configurations, creating geometric figures with 90° angles.



# SPOT 3W | 2700K - 38°

## LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	137lm
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201746DAN

## Structure

black

## Certificazioni

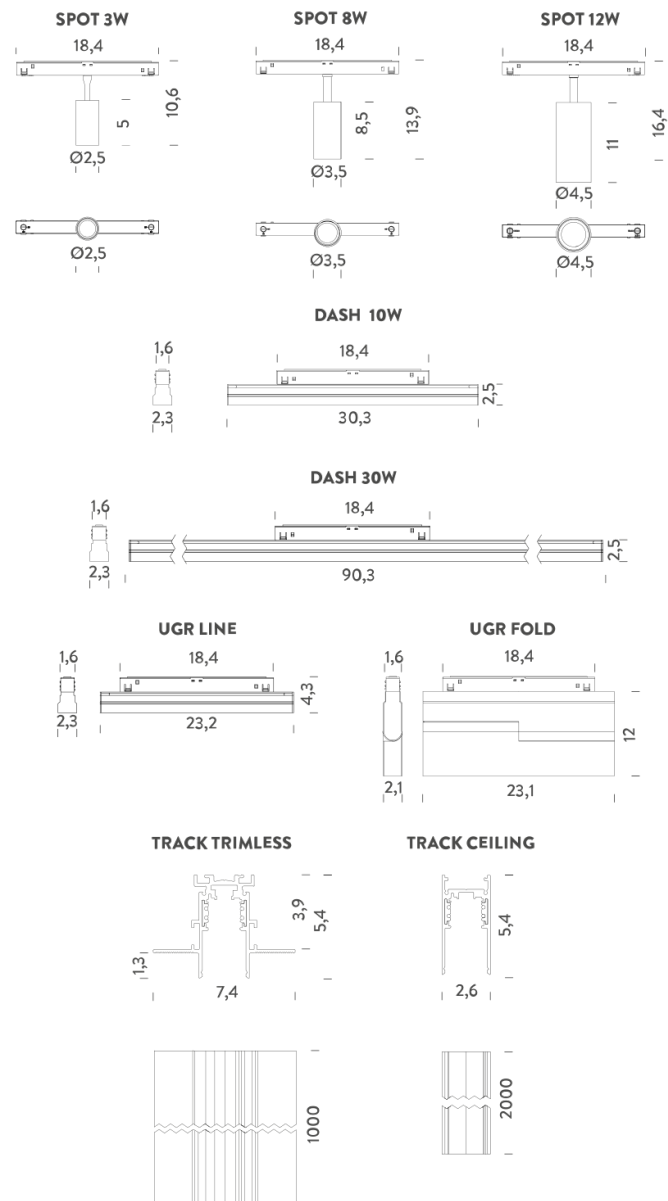

# SPOT 3W | 3000K - 38°

## LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	185lm
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201746WAN

## Structure

black

## Certificazioni

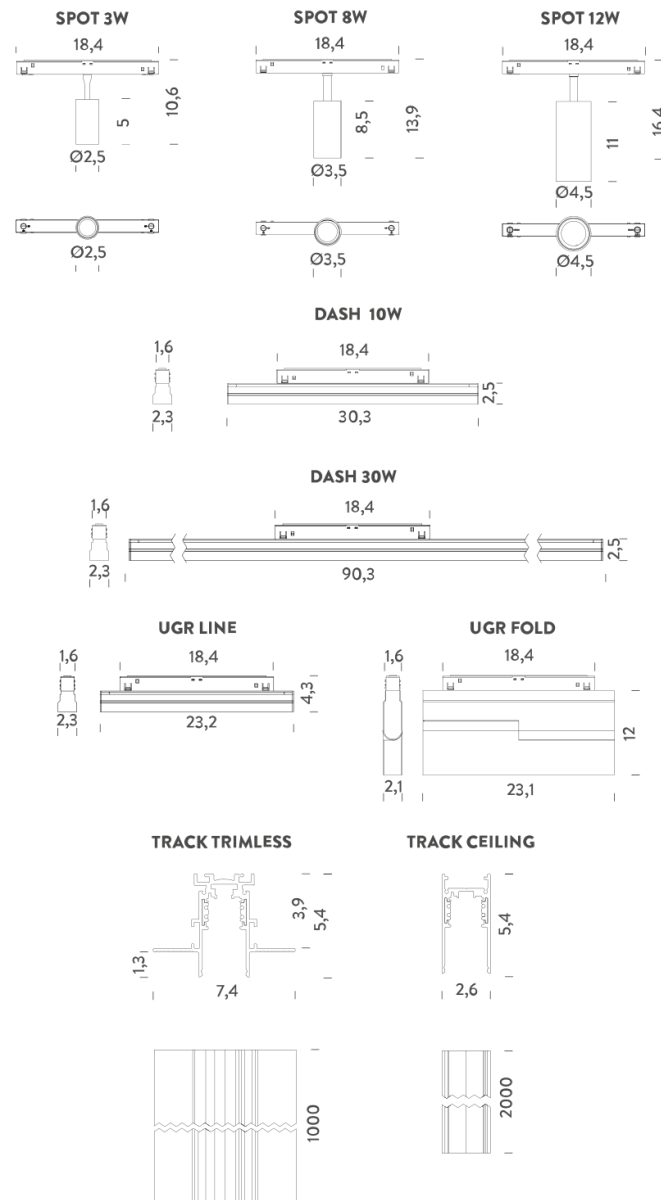

# SPOT 8W | 2700K - 15°

## LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	415lm
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201344DAN

## Structure

black

## Certificazioni

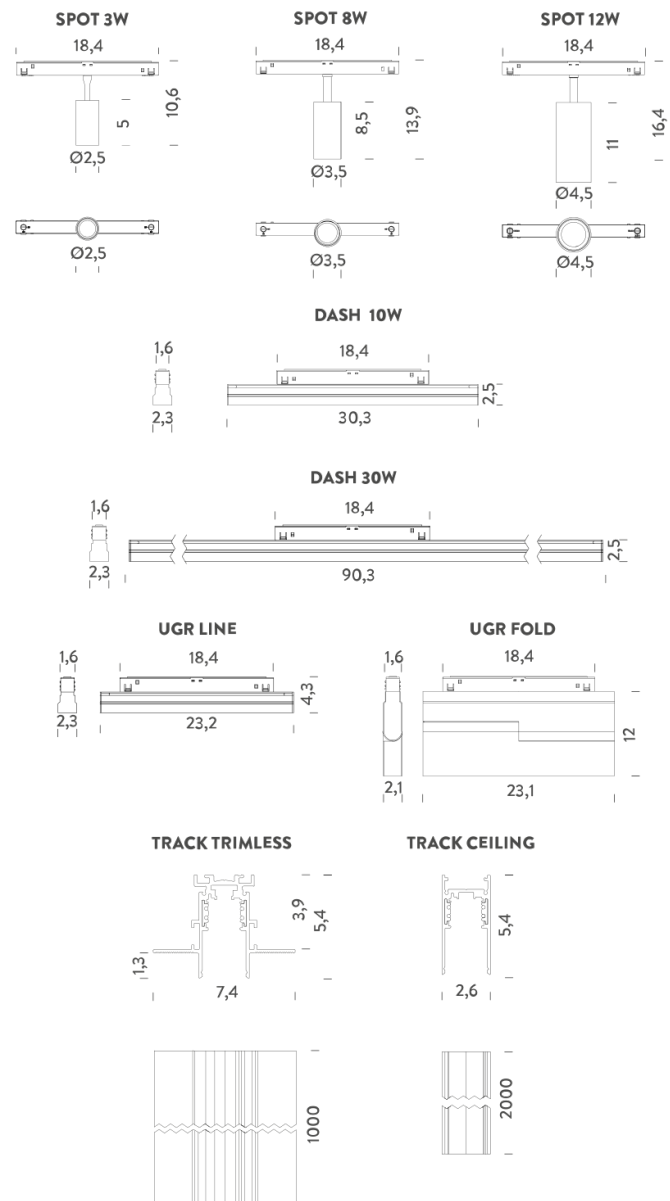

# SPOT 8W | 2700K - 38°

## LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	597lm
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201744DAN

## Structure

black

## Certificazioni

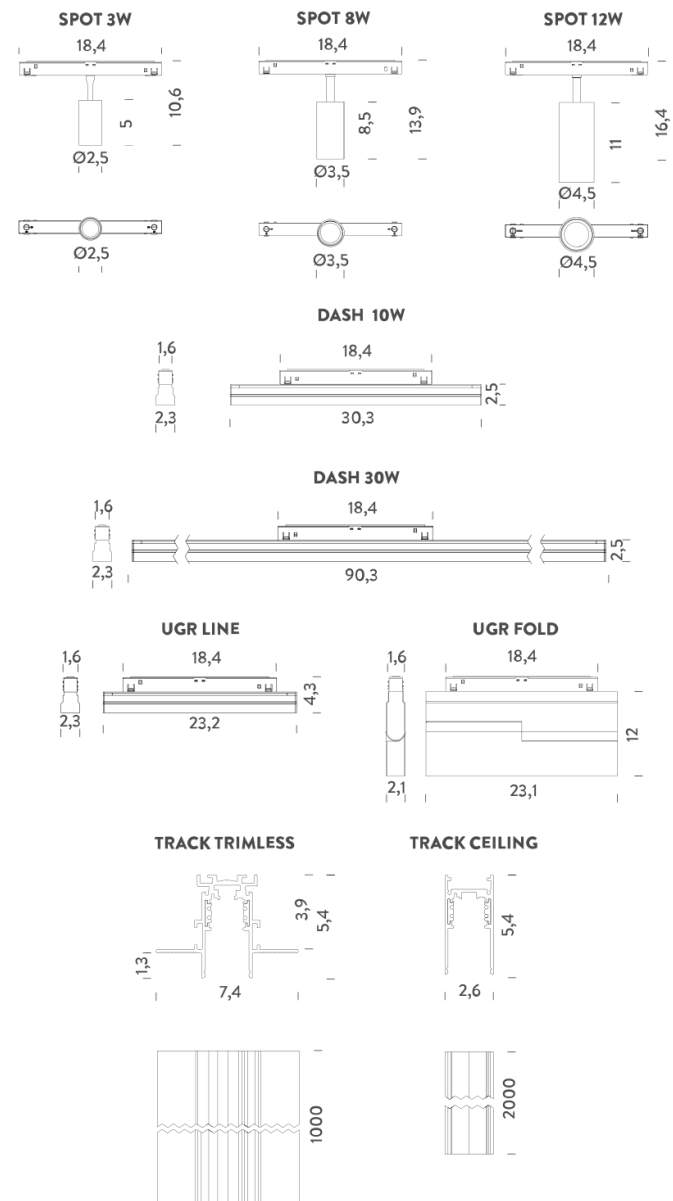

# SPOT 8W | 3000K - 15°

## LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	482lm
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201344WAN

## Structure

black

## Certificazioni

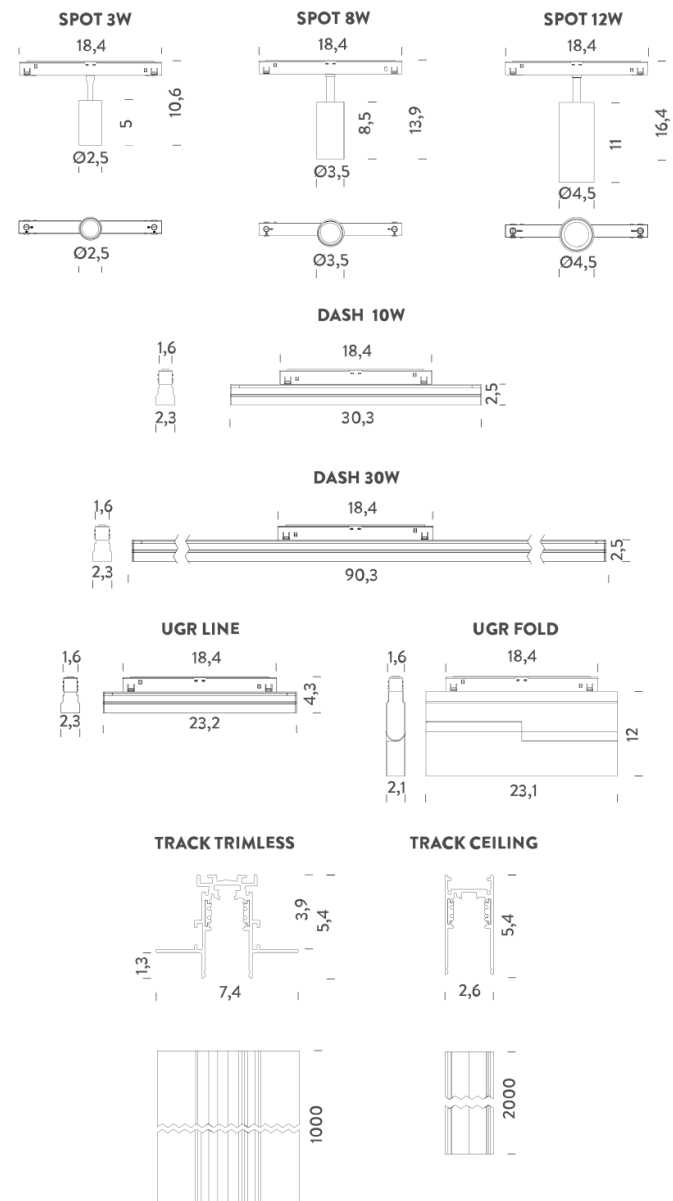

# SPOT 8W | 3000K - 38°

## LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	633lm
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201744WAN

## Structure

black

## Certificazioni

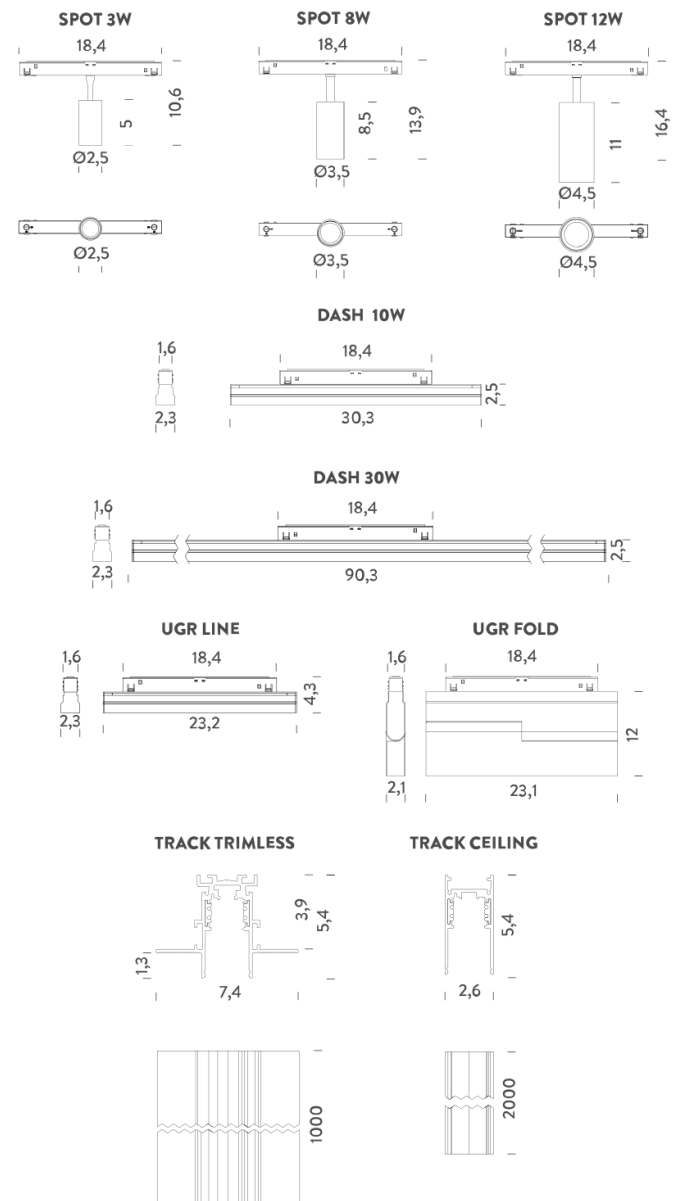

# SPOT 12W | 2700K - 15°

## LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	841lm
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201345DAN

## Structure

black

## Certificazioni

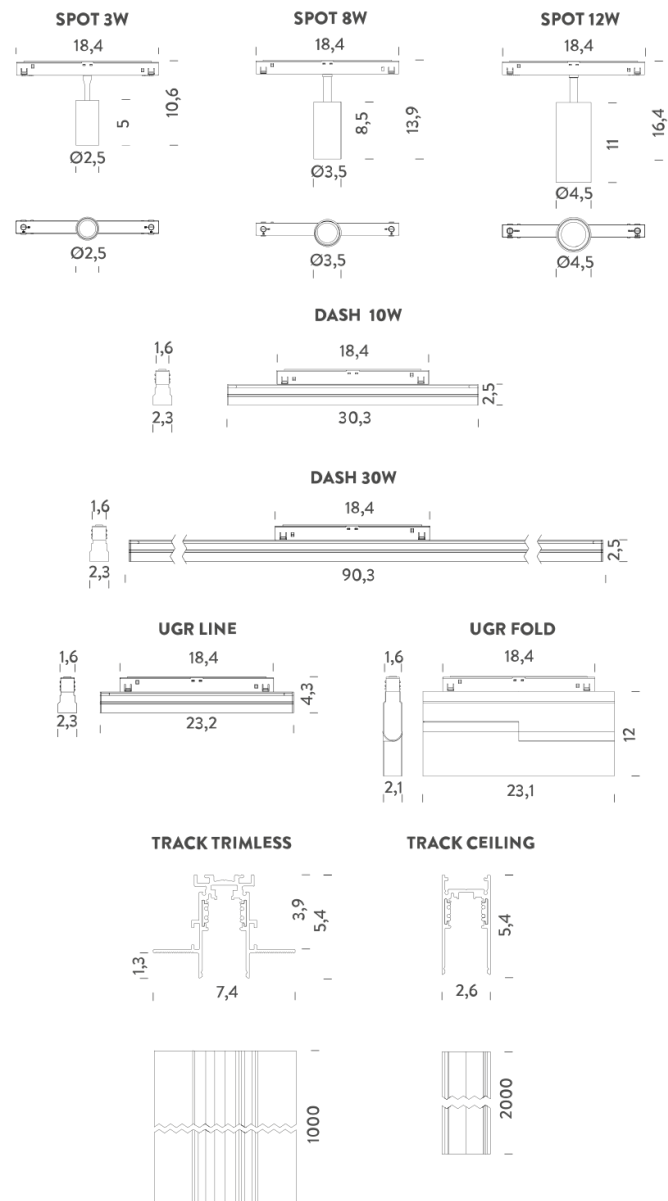



# SPOT 12W | 2700K - 38°

## LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	956lm
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201745DAN

## Structure

black

## Certificazioni

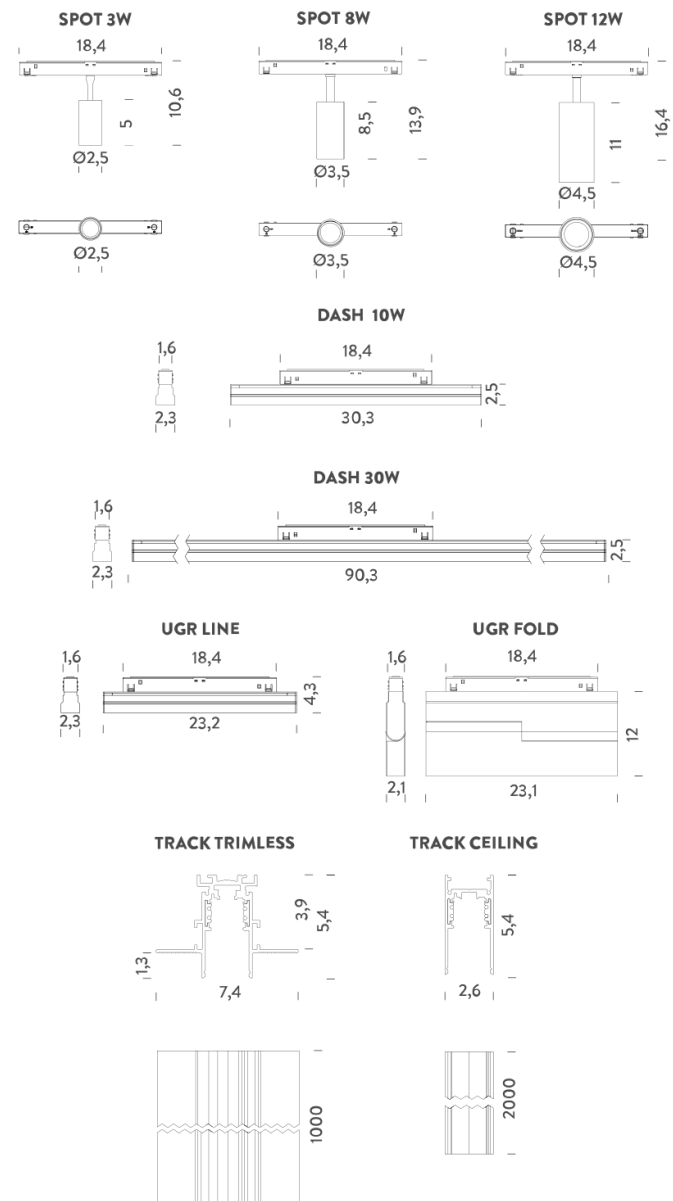

# SPOT 12W | 3000K - 15°

## LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	951lm
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201345WAN

## Structure

black

## Certificazioni

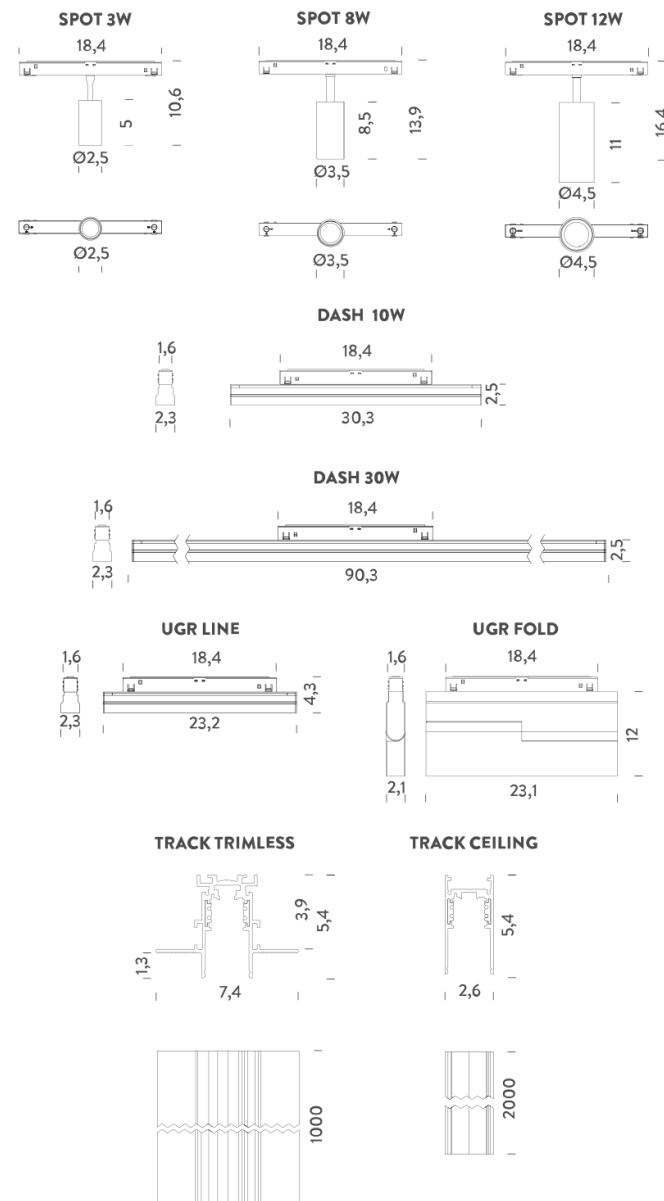

# SPOT 12W | 3000K - 38°

## LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	976lm
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5201745WAN

## Structure

black

## Certificazioni

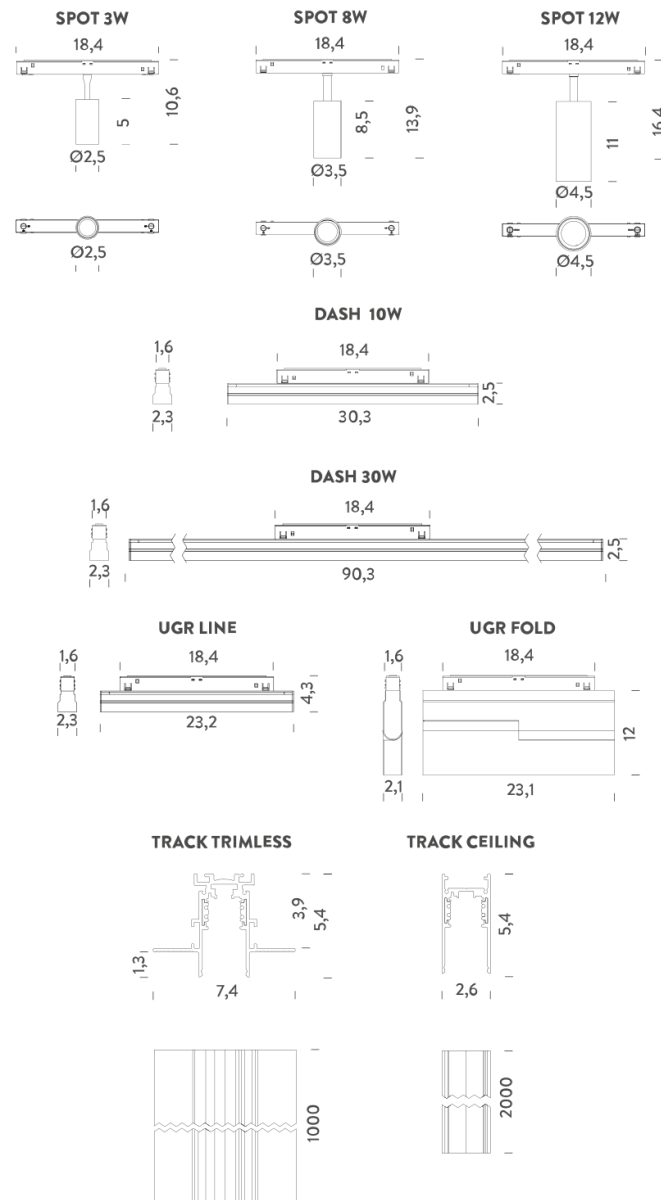

# UGR LINE | 2700K

## LAMPING

Source	LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1146lm
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5302U48DAN

## Structure

black

## Certificazioni

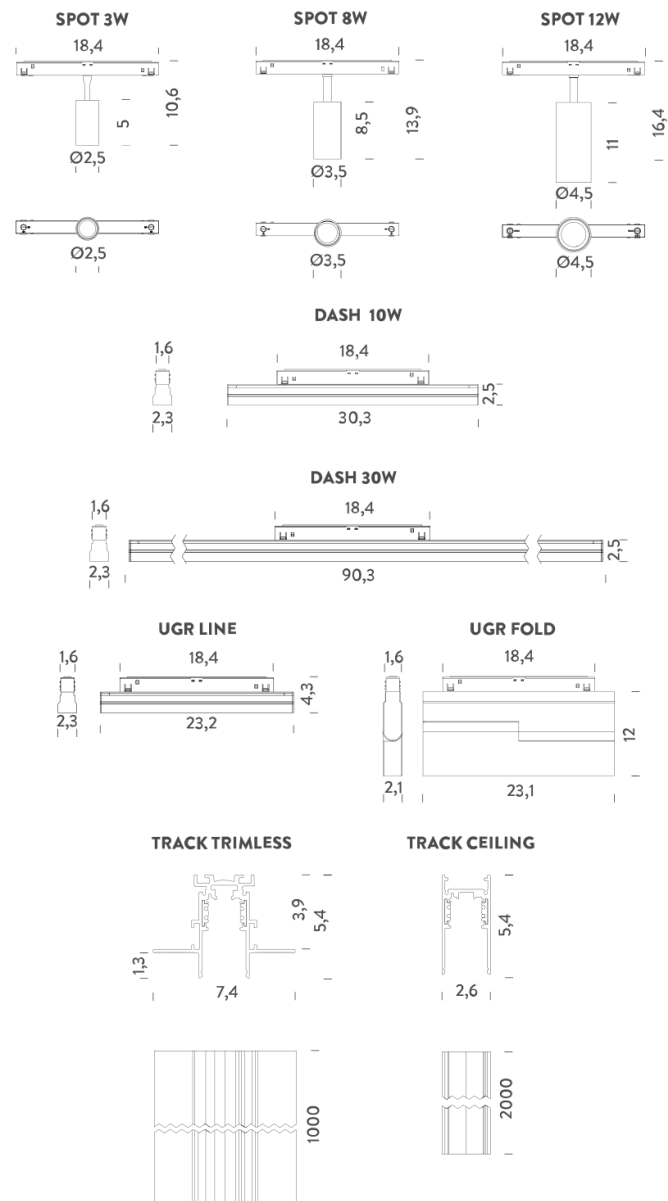

# UGR LINE | 3000K

## LAMPING

Source	LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1165lm
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5302U48WAN

## Structure

black

## Certificazioni

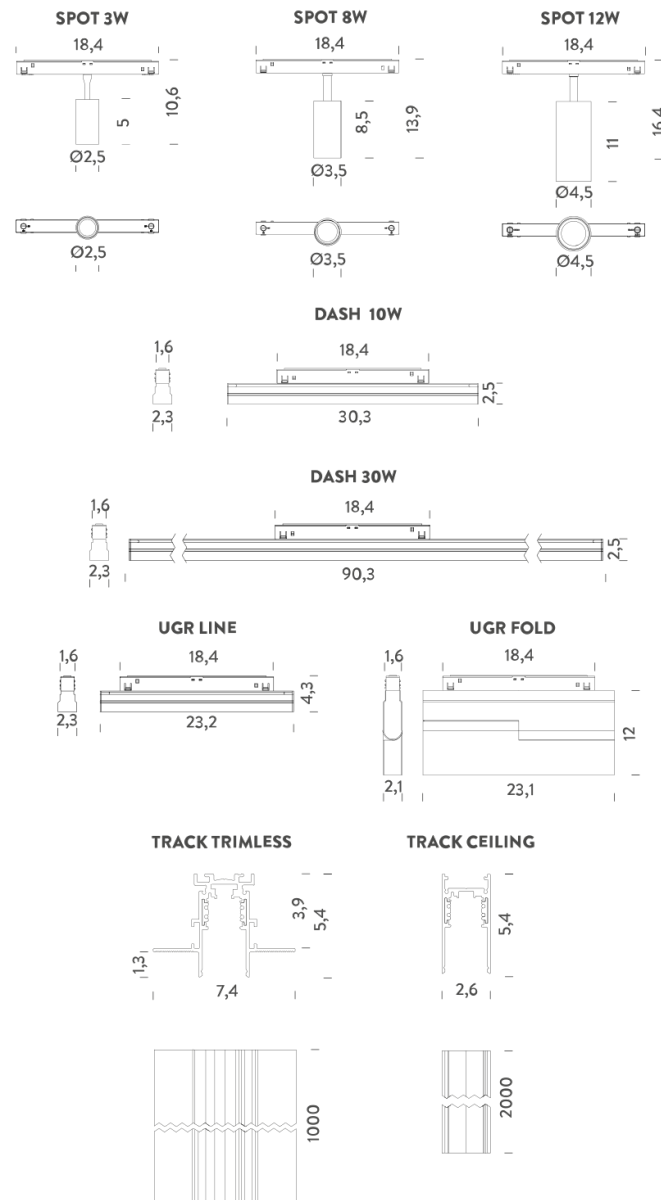

# UGR FOLD | 2700K

## LAMPING

Source	LED
Total power	15W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1397lm
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included
Customization options	asymmetric optic


## Codes

MFLE5202T48DAN

## Structure

black

## Certificazioni

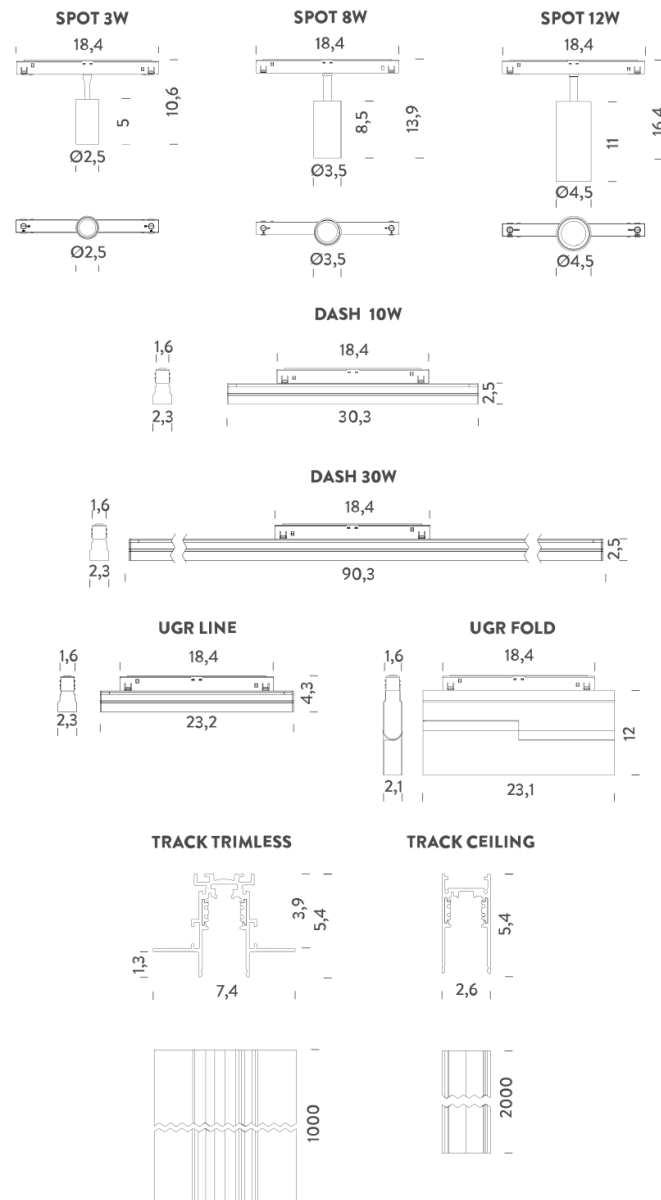

# UGR FOLD | 3000K

## LAMPING

Source	LED
Total power	15W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1550lm
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included
Customization options	asymmetric optic


## Codes

MFLE5202T48WAN

## Structure

black

## Certificazioni

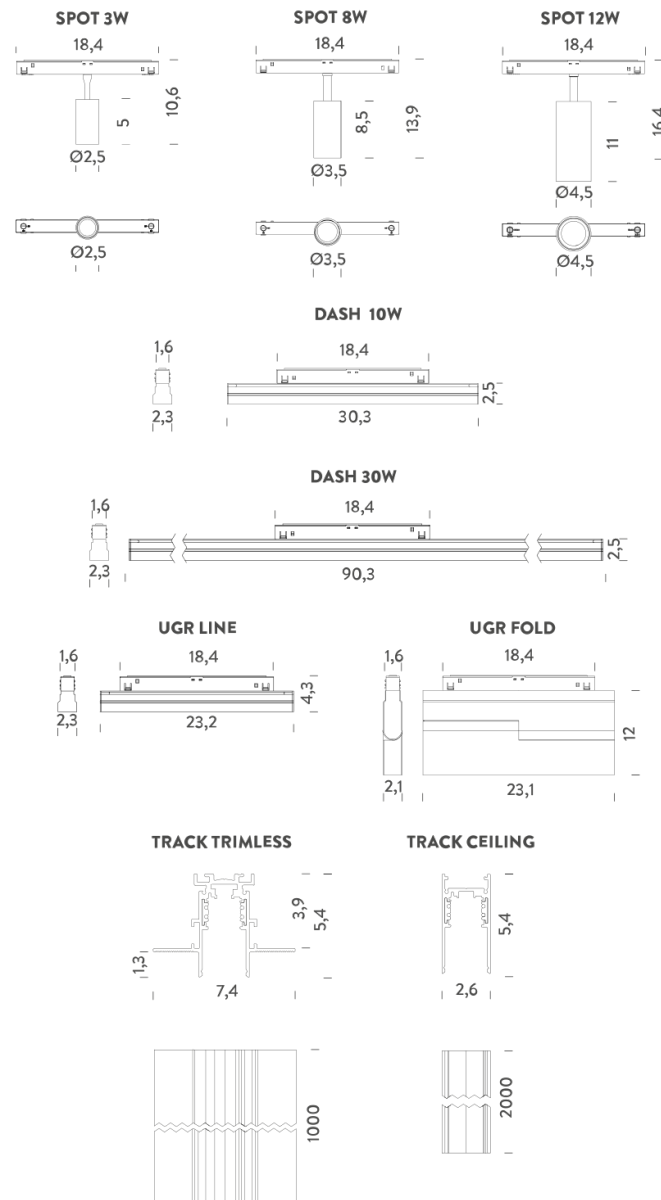

# DASH 10W | 2700K

## LAMPING

Source	Linear LED
Total power	10W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	511lm
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5303G47DAN

## Structure

black

## Certificazioni

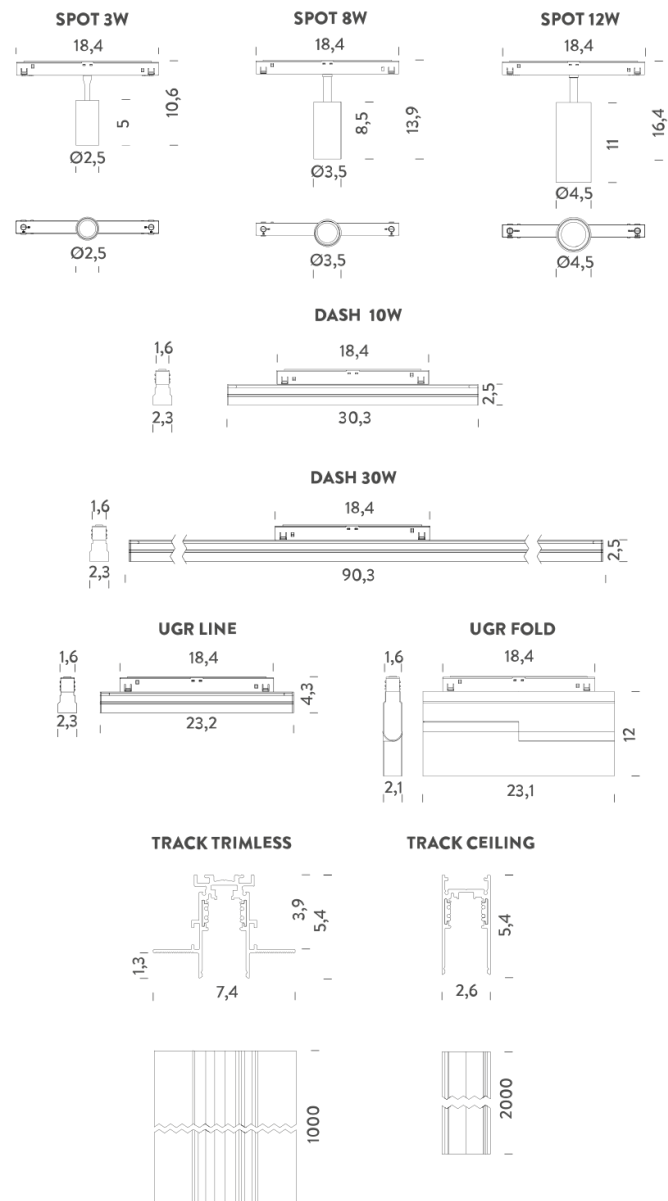



# DASH 10W | 3000K

## LAMPING

Source	Linear LED
Total power	10W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	522lm
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5303G47WAN

## Structure

black

## Certificazioni

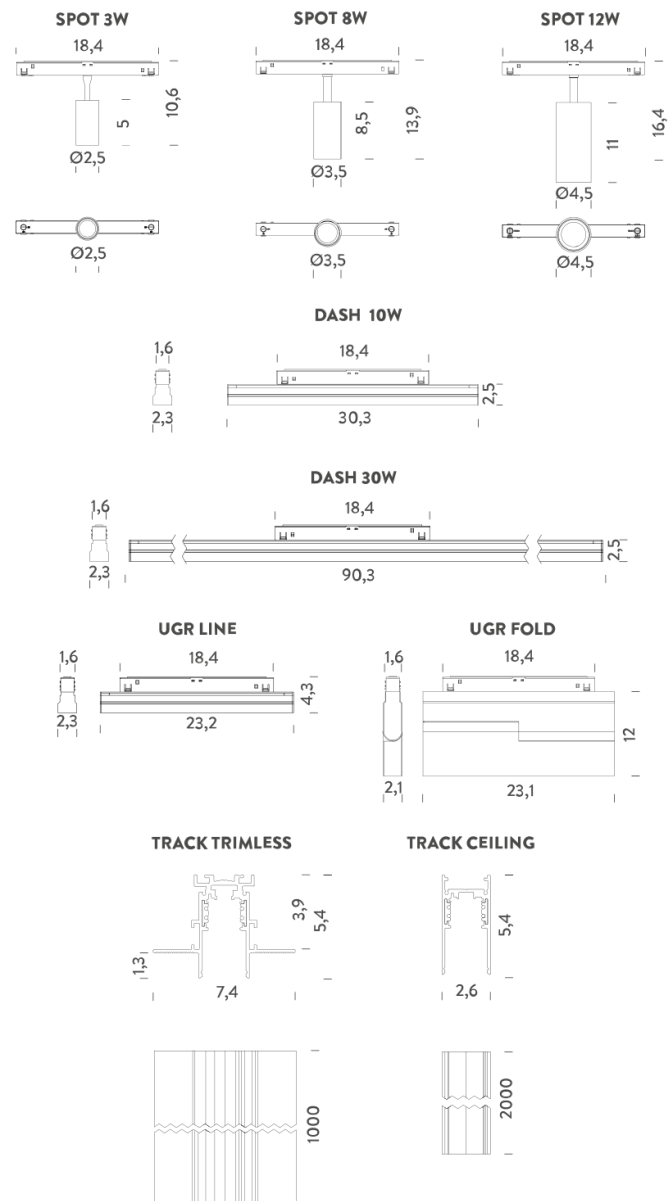

# DASH 30W | 2700K

## LAMPING

Source	Linear LED
Total power	30W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1530lm
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5309G47DAN

## Structure

black

## Certificazioni

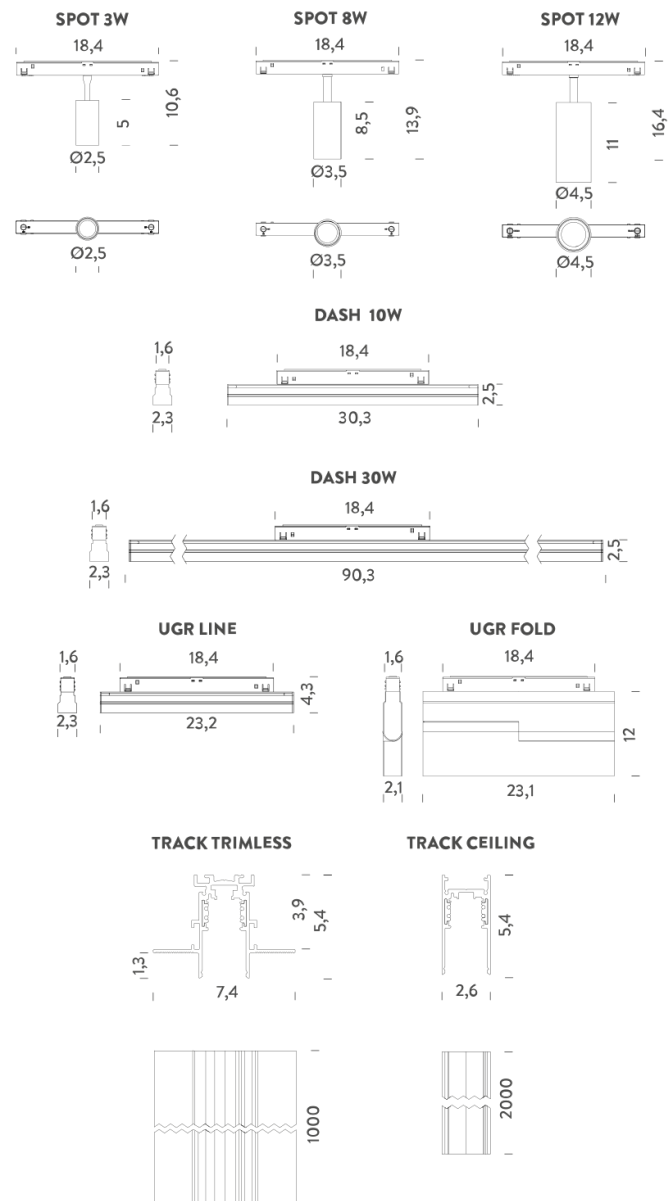

# DASH 30W | 3000K

## LAMPING

Source	Linear LED
Total power	30W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1768lm
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5
Materials	Aluminium + polycarbonate
Notes	driver, track and accessories not included


## Codes

MFLE5309G47WAN

## Structure

black

## Certificazioni

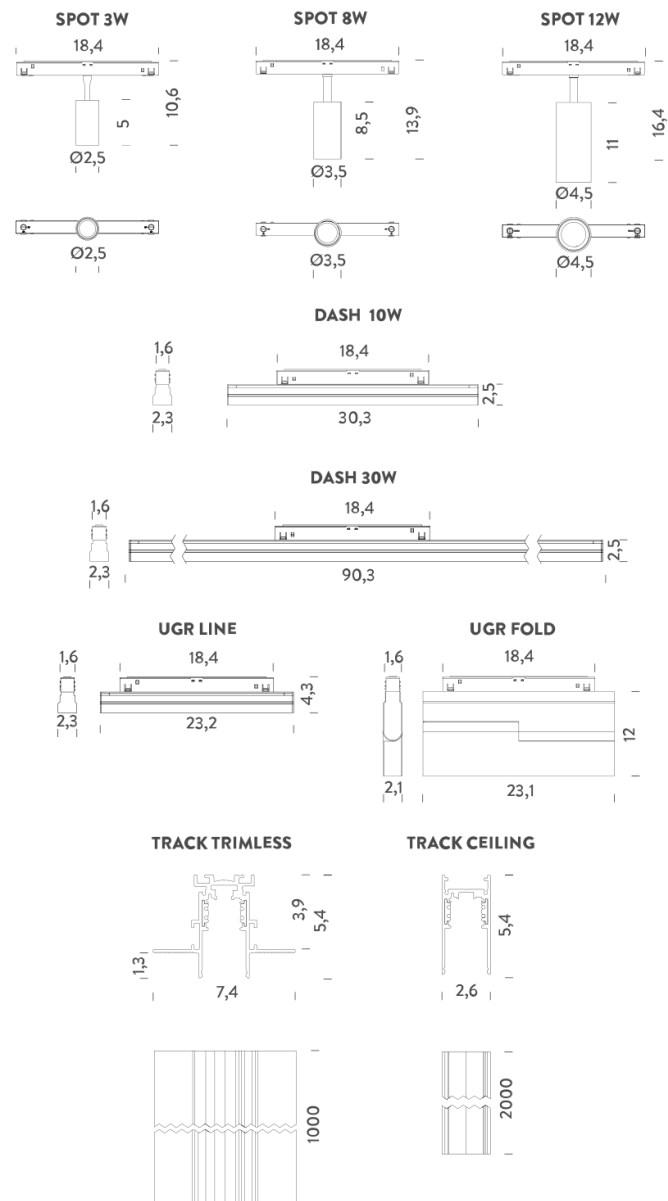

# TRACK CEILING | 1M

## LAMPING


Tension	48V
Dimensions	100x2,6x5,4
Materials	Aluminium
Notes	pendant version available
Customization options	recessed trim version
Accessories	Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories,

## Codes

MFLE0210NE

## Structure

black

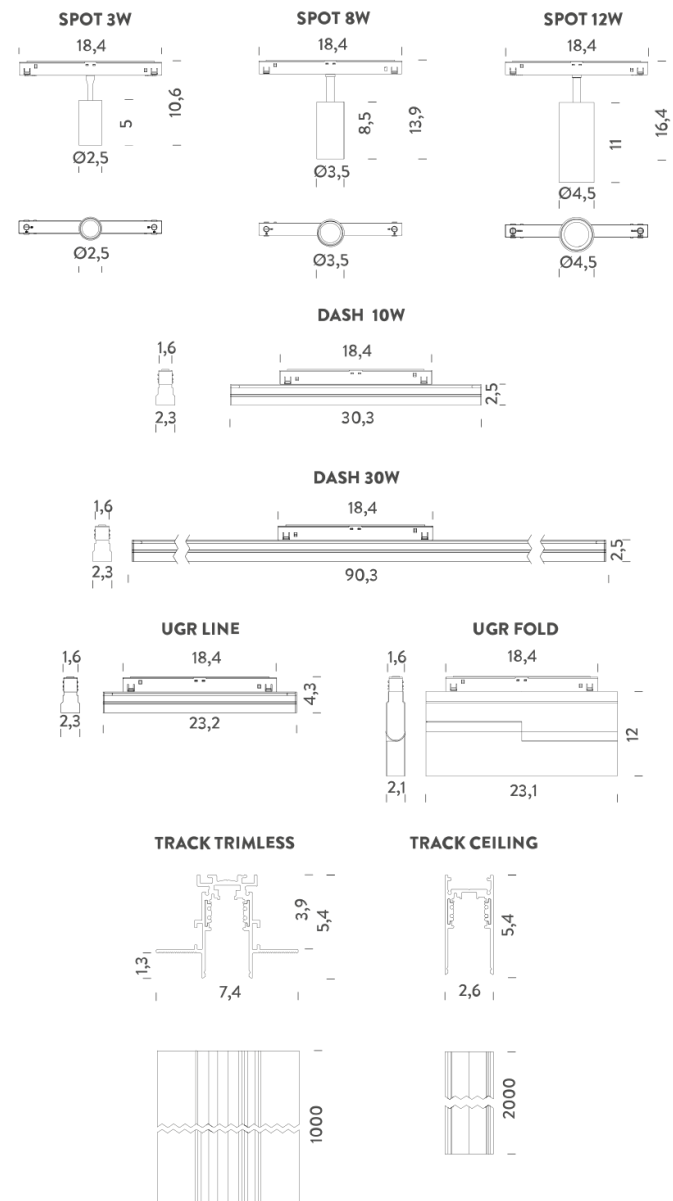

# TRACK CEILING | 2M

## LAMPING


Tension	48V
Dimensions	200x2,6x5,4
Materials	Aluminium
Notes	pendant version available
Customization options	recessed trim version
Accessories	Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories,

## Codes

MFLE0220NE

## Structure

black

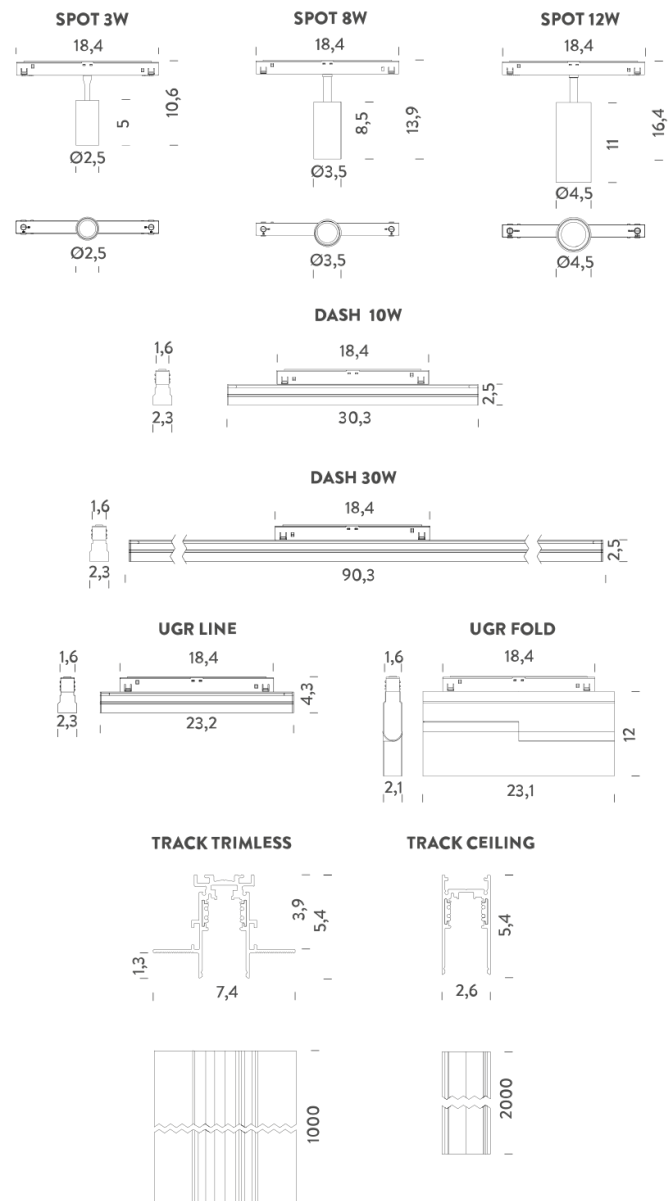

# TRACK CEILING | 3M

## LAMPING


Tension	48V
Dimensions	300x2,6x5x4
Materials	Aluminium
Notes	pendant version available
Customization options	recessed trim version
Accessories	Ceiling-Pendant Track 48V - accessories,   Ceiling-Trimless Track 48V - accessories,

## Codes

MFLE0230NE

## Structure

black

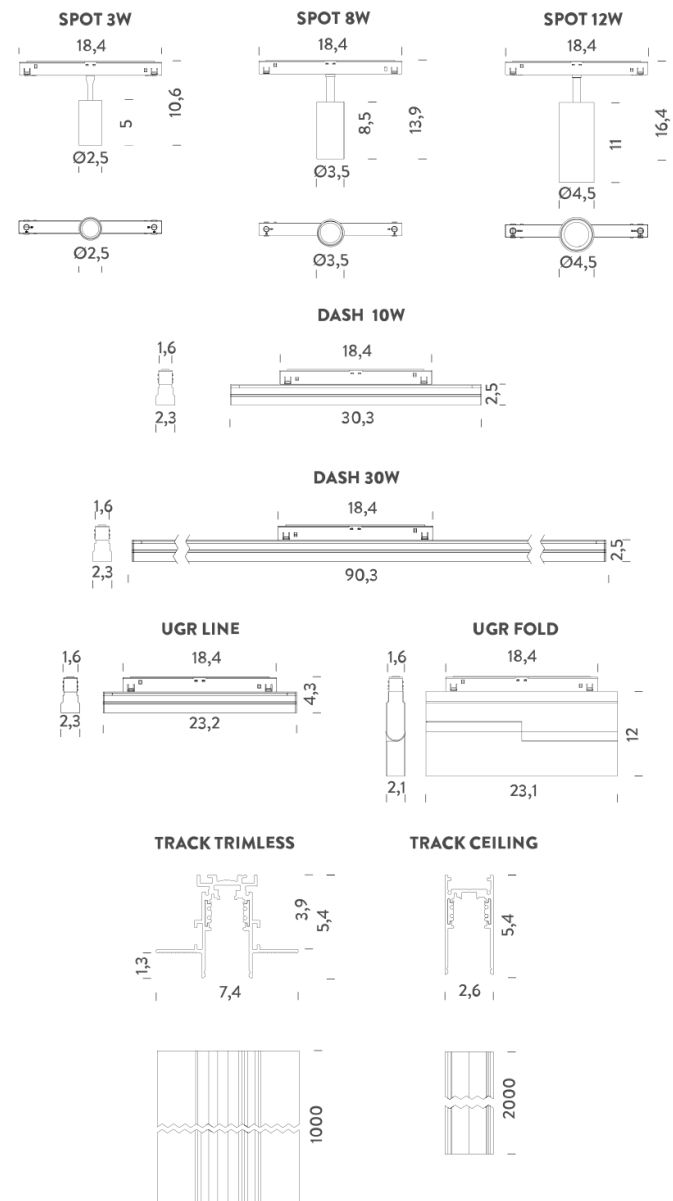

# TRACK TRIMLESS | 1M

## LAMPING


Tension	48V
Dimensions	100x7,4x5,4
Materials	Aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories,

## Codes

MFLE0810NE

## Structure

black

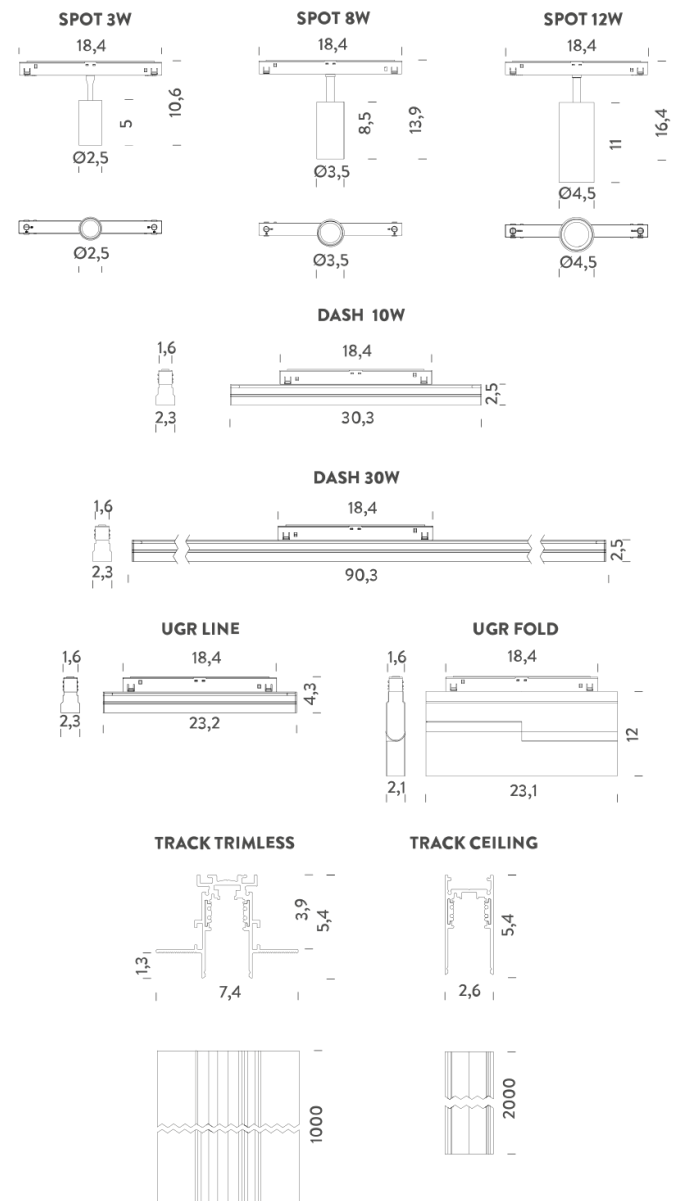

# TRACK TRIMLESS | 2M

## LAMPING


Tension	48V
Dimensions	200x7,4x5,4
Materials	Aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories,

## Codes

MFLE0820NE

## Structure

black

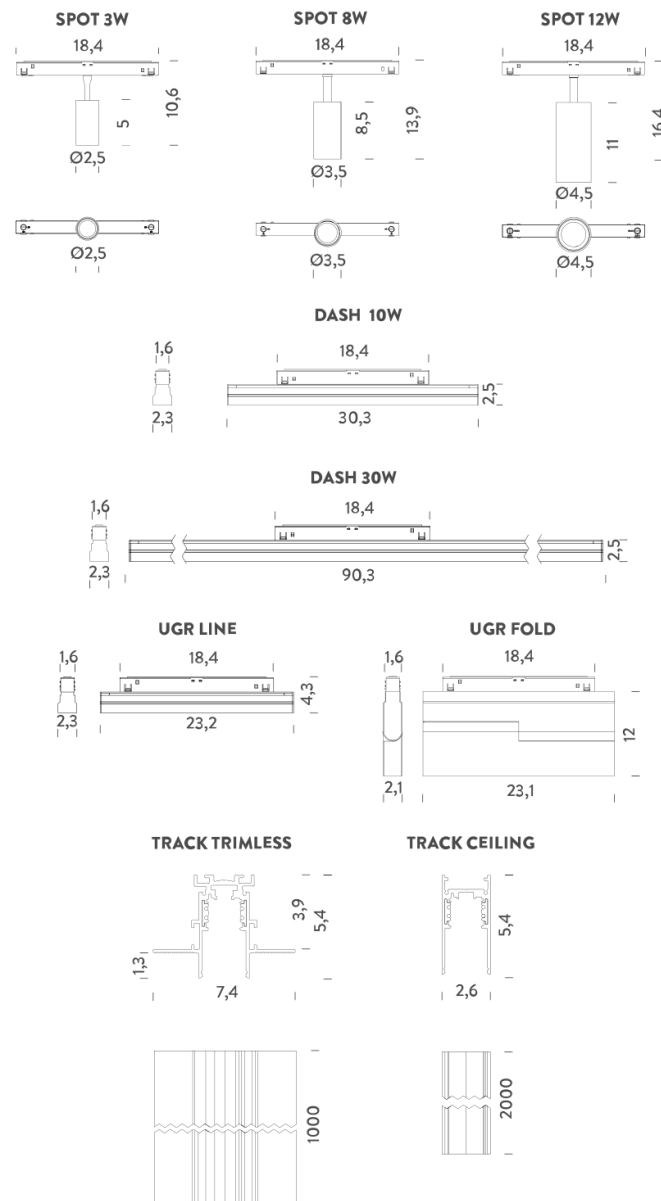



# TRACK TRIMLESS | 3M

## LAMPING

Tension	48V
Dimensions	300x7,4x5,4
Materials	Aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories,   Trimless Track 48V - accessories,

## Codes

MFLE0830NE

## Structure

black

