

Spy

A new take on classic.

MINIMALISM, FUNCTIONALITY AND VERSATILITY

are the key terms to describe this extensive collection. The Spy was designed to meet multiple lighting requirements, an ideal solution for accent lighting in residential, hospitality or commercial spaces.

The range features low to high lumen packages, narrow to wide beam options, standard or specific LED colours, recessed to surface mounted and track applications, different colour finishes and combinations, and can be equipped with multiple light refining accessories.

SPY TRIMLESS



SPY CLIP



SPY ON



SPY C






SPY TRACK

SPY PROFILE MODULE

RANGE

															
			TRIMLESS	TRIM	CLIP	ON			C	SUPERLOOP	TRACK	PROFILE			
															
SPY															
27	LED	753-787 lm			✓	✓	✓	✓							✓
39	LED	380-1089 lm	✓	✓	✓				✓	✓	✓		✓		✓
52	LED	1041-1467 lm	✓	✓	✓				✓	✓	✓	✓	✓	✓	✓
	SOFT	945 lm	✓	✓	✓				✓	✓	✓		✓	✓	✓
	TW	1087 lm	✓	✓	✓				✓				✓	✓	✓
62	LED	1083-1128 lm								✓					✓
	GU10	-							✓						✓
Focus	LED	769-2125 lm			✓				✓				✓	✓	✓
66	LED	2068-2907 lm			✓				✓				✓	✓	✓
	TW	1087 lm			✓				✓				✓	✓	✓
90	LED	3169-4592 lm							✓				✓	✓	✓
	TW	2054 lm											✓	✓	✓



BLACK

WHITE

FLEMISH GOLD

GOLD COLOURED

FLEMISH BRONZE

SPY TUBE



RANGE


SPY 90
Up to 4600lm
Ceiling Heights up to 6m

SPY 66
Up to 3000lm
Ceiling Heights up to 4,5m

SPY 52
Up to 1500lm
Ceiling Heights up to 3m

SPY 39
Up to 1100lm
Ceiling Heights up to 3m

SPY 27
Up to 800lm
Ceiling Heights up to 3m

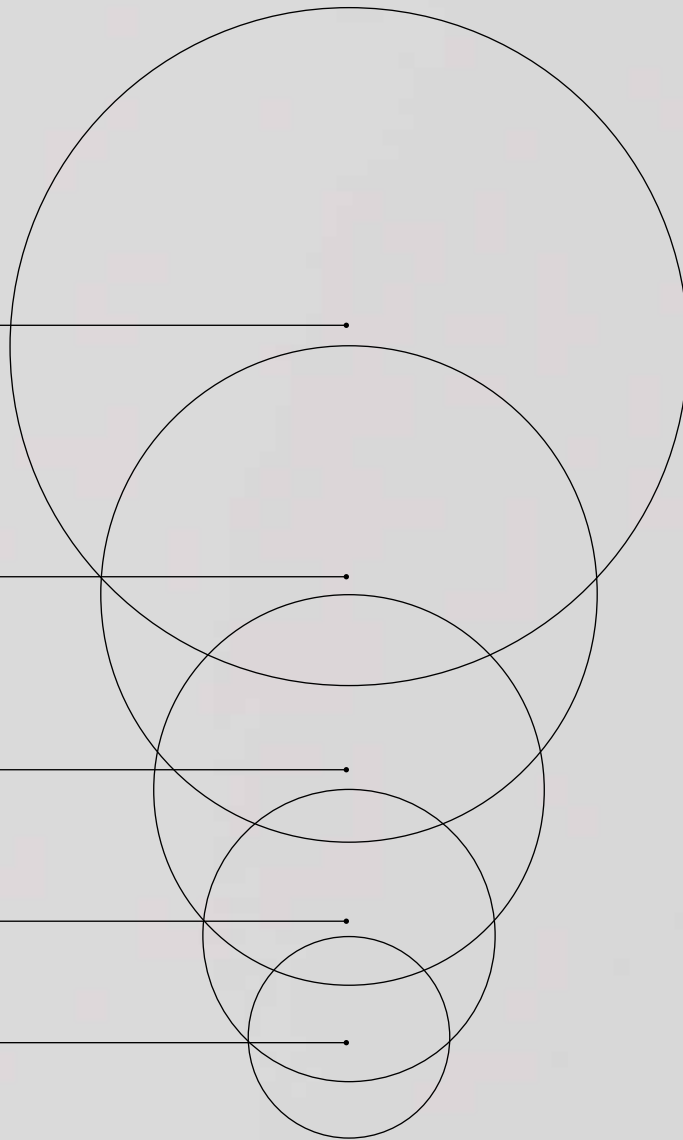


27 / 39 / 52 / 66 / 90

Following the constant changes in the world of LEDs and optics and the evolution to better user comfort with more precise optics and better light control, the complete Spy range has been upgraded.

The result? Fresh shapes and additional finishing colours, better light comfort through hybrid optics, improved LED colour consistency and new perspectives with Tunable White and Soft Dim.

The renewed Spy family comes in diameters of 27, 39, 52, 66 and 90 millimeters, a range of spotlights to fit any purpose. While the smaller versions come in the lively colours Flemish Bronze, Flemish Gold and Gold Coloured, the bigger Spy's offer Tunable White and Soft Dim solutions in multiple beam angles.



INSTALLATION
Recessed, semi-recessed,
surface mounted,
into the ceiling or onto the wall,
on track or on other linear profiles,
an abundance of installation
options.



LUMINAIRE HOUSING
Pure colours
White, Black, Flemish Gold,
Flemish Bronze, Gold Coloured
—
Short / Long Tube

SOFT DIM
Creates a warm cosy glow
when dimming down (from
3000K to 18000K)
—

TUNABLE WHITE
Lets you follow the rhythm
of the sun by changing the
white spectrum between
2700K and 6500K

LED ENGINE
Advanced Bridgelux
LED engines delivering high performance,
maximum efficacy and high-quality illumination

Colour Rendering Index 90
—

Colour Temperature: 2700K / 3000K
—

Colour Consistency 1 SDCM
—

Lifetime L90 B10 50.000h
—

6W – 800lm up to 36W – 4600lm
—

OPTICS

Interchangeable hybrid

▼ No visible LED while maintaining the look and feel of a reflector

— Optimal colour mixing thanks to the domed shape lens

— Minimal spill light as there is full control of the light thanks to the double optics

▼ Spot, Medium, Flood

ACCESSORIES

Accessory holder for a range of **light refining accessories**

▼ Honeycomb, SBL glass, linear spread lens, spread lens, softening lens

— Visor for Spy 27 & Spy 39

▼ **Up to 2 accessories** can be combined

**TAKE
A LOOK
INSIDE.**

TUBE

▼ Personal touch to finish off the luminaire

Multiple colour finishes


White, Black, Flemish Gold, Flemish Bronze, Gold Coloured

LED ENGINE, THE BEATING HEART.

Together with the optical compartment, the LED engine is the beating heart of the luminaire. That's why only the best is good enough to use within the Spy range. Throughout the complete range advanced Bridgelux LED engines are being used, delivering high performance, maximum efficacy and high-quality illumination. A colour consistency of 1 step MacAdam, Soft Dim and Tunable White are some of the key aspects that make this a strong heart.

SOFT DIM


Soft Dim LED technology replicates the dimming behaviour of a conventional lamp where the colour temperature increases in warmth as it is being dimmed. Within the Spy 52 range, Soft Dim is available in 2 beam angles (20° and 45°) and dims down from 3000K to 1800K. This can be done by conventional phase dimming as well as 1-10V or DALI dimming.

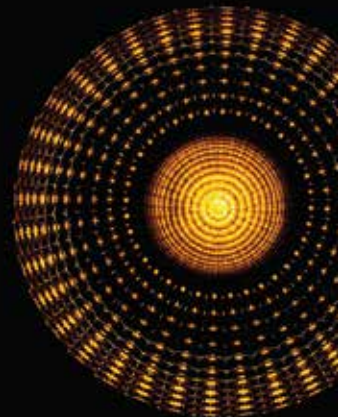

TUNABLE WHITE

Since its creation, DL has embraced a continuous innovation process to integrate the latest technological developments towards fixtures characterized by good colour consistency, glare mitigation, design and aesthetics. These aspects satisfy the functionality of the lighting installation and create a pleasant ambient to affect the emotions of the end-user in a positive way. Apart from the visual aspect this can also impact the circadian rhythm, as Spy Tunable White can do.

The circadian clock regulates processes such as the melatonin secretion - a hormone responsible for the sleep - and our concentration and level of alertness. The change in the working places towards indoor spaces isolates us from the natural stimulus of sunlight and therefore our circadian clock needs to be stimulated by artificial lighting emulating the daylight cycle. Spy Tunable White is an example of a luminaire that is able to simulate daylight by changing the colour temperature during the day.

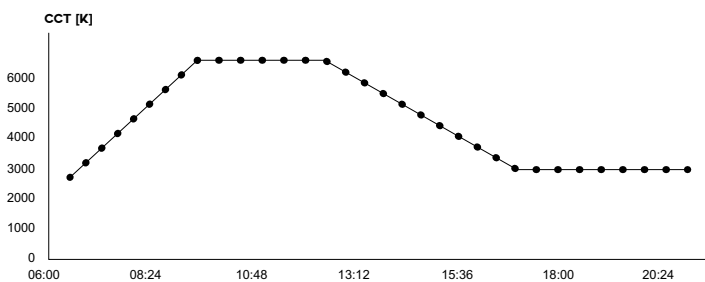


2700K



6000K

OPTICAL PERFORMER, CONTROLLED BEAMS.



LED + HYBRID OPTICS

Every ray of light passes through the dome and is directed into the reflector, where it hits the high reflective surface and leaves the luminaire into the desired way. As the light is fully controlled by the combination of dome and reflector, clean beam angles can be created with a sharp cut-off.

HYBRID OPTICS

While the smaller Spy 27 and Spy 39 make use of a reflector, Spy 52, 66 and 90 contain a hybrid optic. Hybrid as the optical compartment combines a high-efficient reflector with a small dome covering the LED. The dome serves as a mixing chamber to offer an optimal colour consistency, even when using Tunable White and Soft Dim. Next to this, it reduces the spill light to a minimum and makes the yellow LED less visible while maintaining the look and feel of a reflector luminaire. The reflector on the other hand serves to boost the efficiency to a maximum, as its high reflectance surface emits all rays of light coming from the dome in the desired direction.


INTERCHANGEABLE (FOR SPY 52 / 66 & 90)

The build-up of the Spy range with hybrid reflectors allows for an easy interchangeability of the optics. By removing the front tube from the luminaire, the optical compartment can easily be removed and be replaced by another beam angle if needed, completely toolfree.

HIGH POWER

The luminaires within the Spy range are specifically designed to protect the optical compartment from overheating. By optimizing the internal thermal management, the Spy luminaires can be driven at higher current and allow for a higher output out of the luminaire.

OPTICS

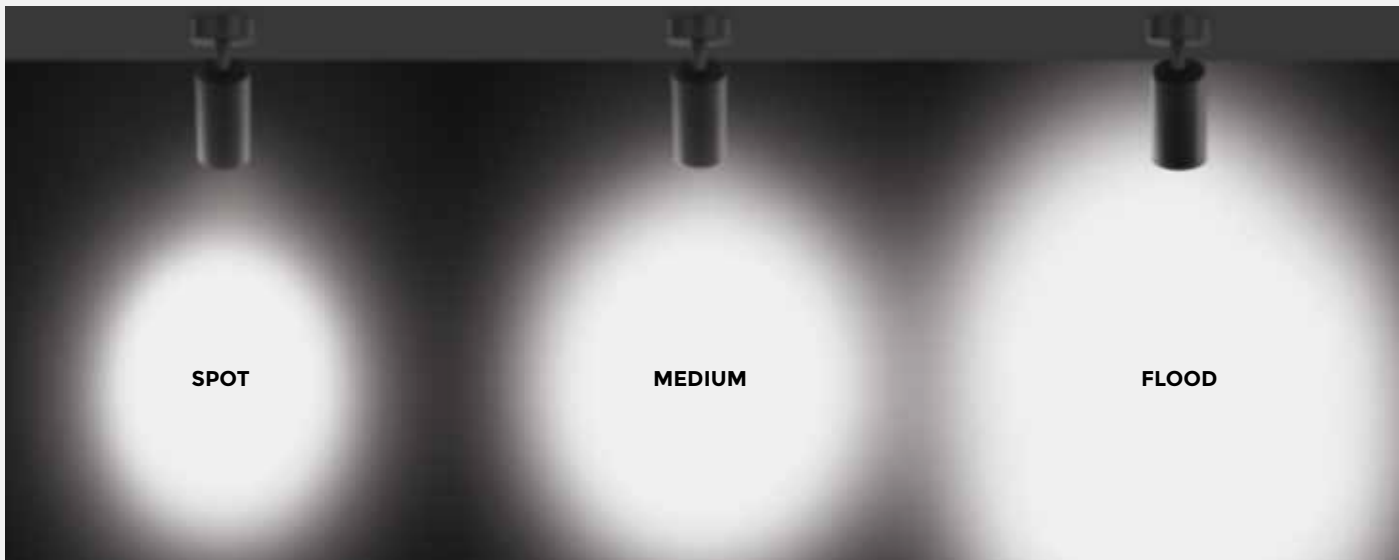


SPY 27	-	30°	-
SPY 39	20°	-	40°
SPY 52	20°	-	45°
SPY 66	18°	30°	45°
SPY 90	18°	30°	45°

FOCUS





SPY 27	8°	43°
SPY 39	12°	45°

SOFT DIM

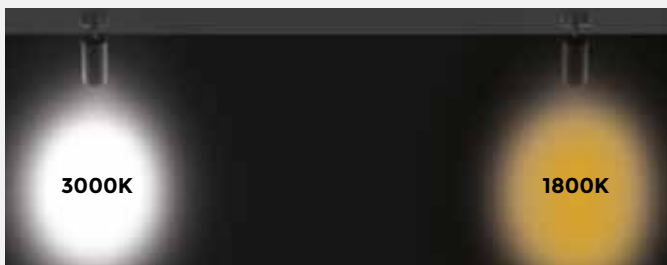

TUNABLE WHITE

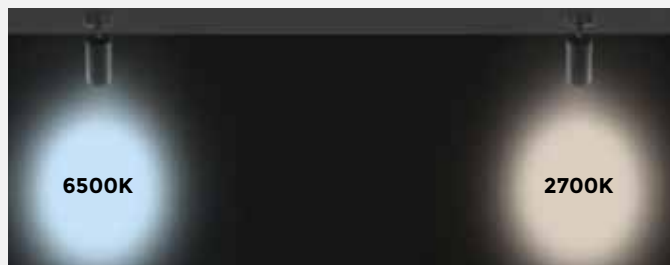



ADJUST THE BEAM TO YOUR NEEDS.

To offer even more flexibility and design freedom to the lighting designer, within the bigger versions of Spy (52 / 66 / 90) a range of light refining accessories is available to alter the light effect to the specific needs of the setting.

A honeycomb to further minimize the direct glare from the light source, a sandblasted glass to create a diffuse general light effect and 3 specific lenses to either create a more oval or a wider light distribution or to smoothen the edges and create a softer transition.

Within these versions up to 2 accessories can be combined.

The smaller versions of Spy (27 / 39) can be foreseen with a visor to reduce the glare from the light source.



LINEAR SPREAD LENS



SPREAD LENS





HONEYCOMB




SOFTENING LENS



GLASS SBL





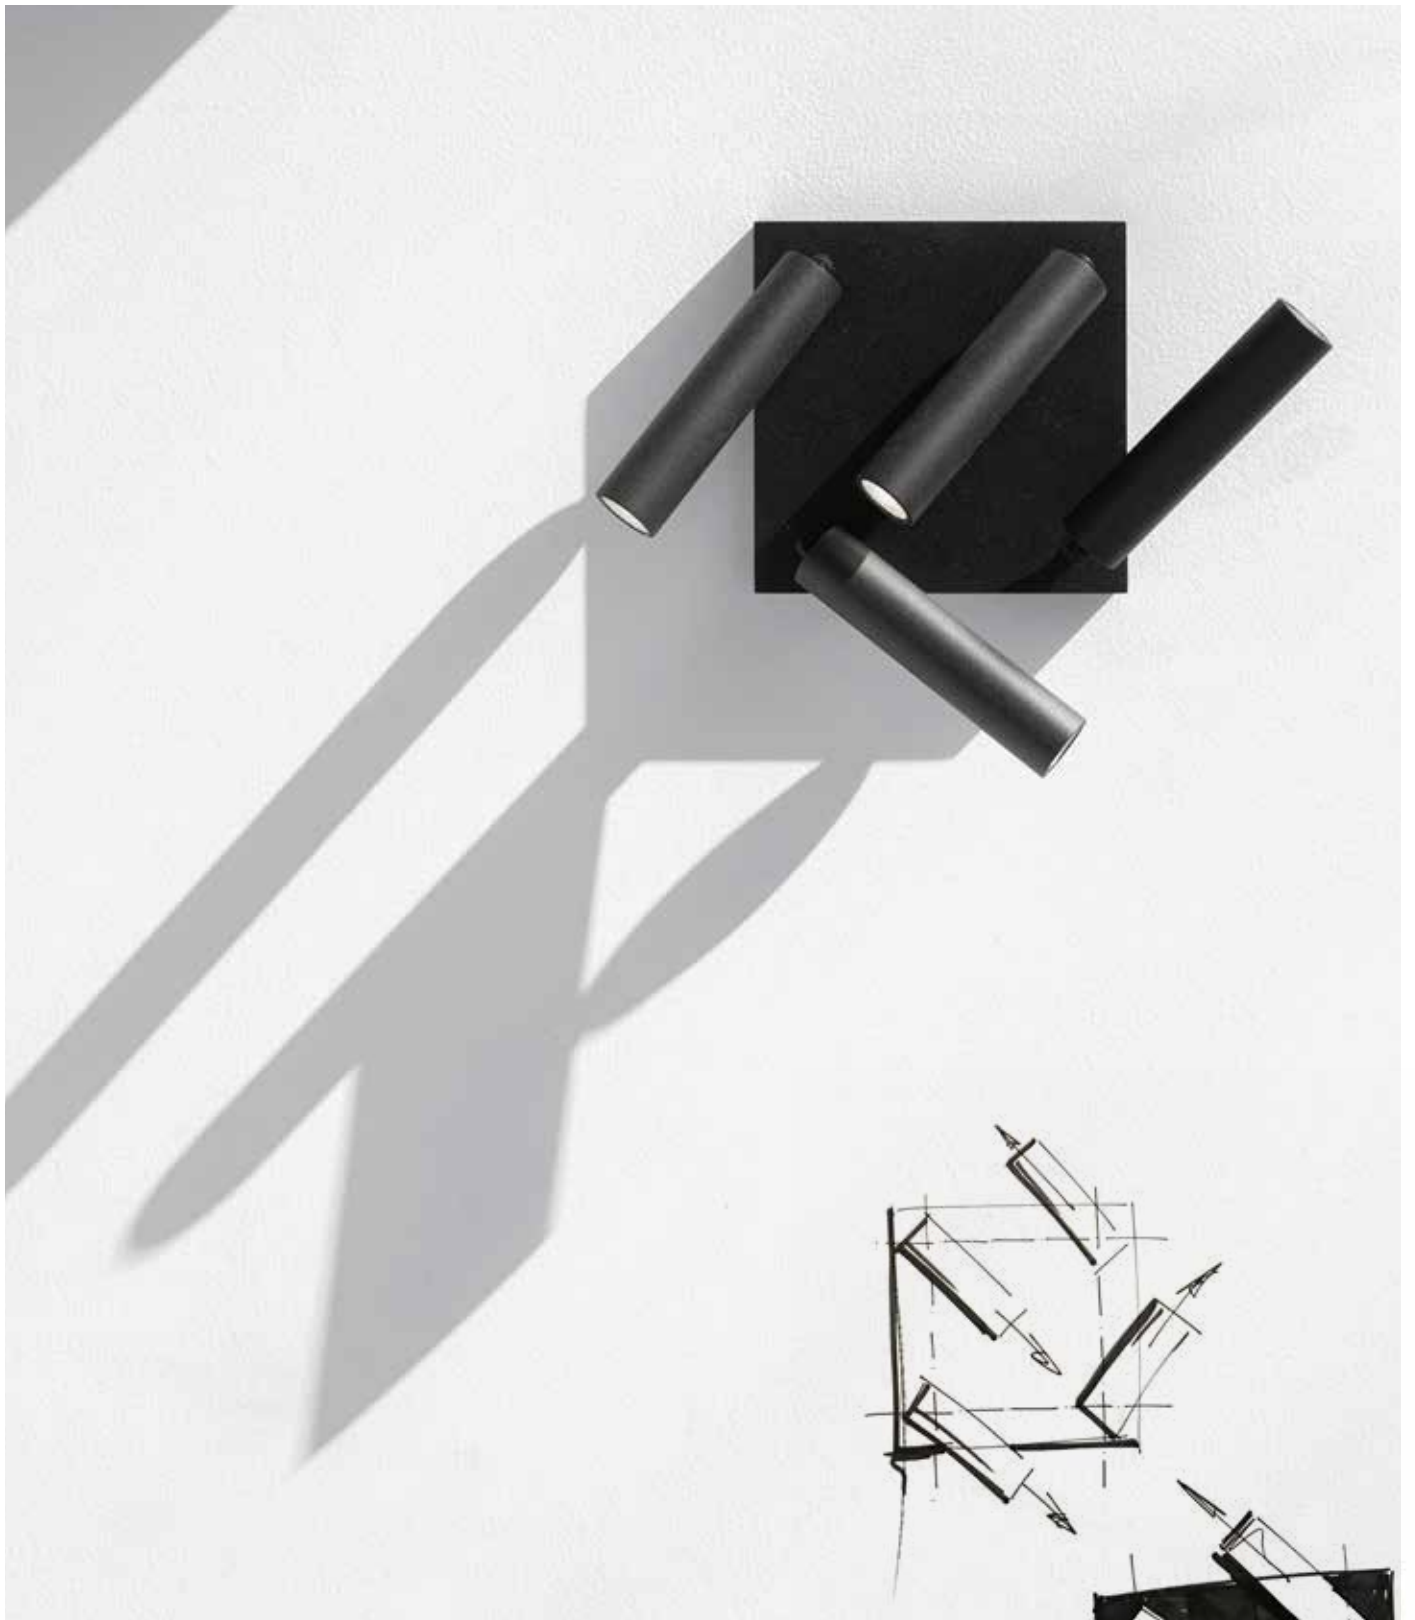

**SPY,
IN ALL ITS GLORY**



SPY 27

CHOOSE YOUR COLOUR



Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

CHOOSE YOUR INSTALLATION

Semi-Recessed
Short / Long

Surface mounted
Single / Double / Quadruple

POWER

5,8W – 790lm

CHOOSE YOUR LED COLOUR

2700K / 3000K

OPTICS

30°

ACCESSORY

Visor



SPY 27

Spy 27 is the smallest of the range and comes as a Clip version or as surface mounted spotlight with 1, 2 or 4 cylinders on top. Don't be fooled by its size, with a power of 5,8W it perfectly serves for general lighting in residential environments. For optimized visual comfort, a visor is available to reduce the glare when looking into the luminaire. The body of Spy 27 comes in 2 lengths, with an additional visual comfort for the longest version as the LED is hidden away deeper into the body.

www.deltalight.com/spy-27





SPY 39

Compact in design, complete in functionality. Spy 39 is one of the most elaborate members of the family thanks to its multiple lumen packages, beam angles and ways of installation. As a recessed solution, Spy 39 comes in many appearances. The Trimless version can serve both as a downlight or as an adjustable spotlight, as the body can either be completely hidden into the ceiling or fully visible to aim it wherever you want. As surface mounted version, Spy 39 On comes with single and double head combinations, with a short or longer cylinder on top. The On box has a custom designed power supply inside to make the housing as flat as possible. Similar to the On version, but without the visible surface mounted box, Spy 39 Clip hides away the installation part into the ceiling. The result is a single spotlight with a minimalistic yet sophisticated look. Powering up to 8,6W and available in multiple finishing colours, Spy 39 is suitable for a range of applications.

www.deltalight.com/spy-39



SPY 39

CHOOSE YOUR COLOUR



Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White



Front tube in
Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

CHOOSE YOUR INSTALLATION

Recessed
With trim / Trimless

Semi-recessed
Short / Long

Surface mounted
Single / Double
Short / Long

CHOOSE YOUR POWER

5,8W up to 8,6W – 790 up to 1090lm

CHOOSE YOUR LED COLOUR

2700K / 3000K

CHOOSE YOUR OPTICS


20° / 40°

ACCESSORY

Visor





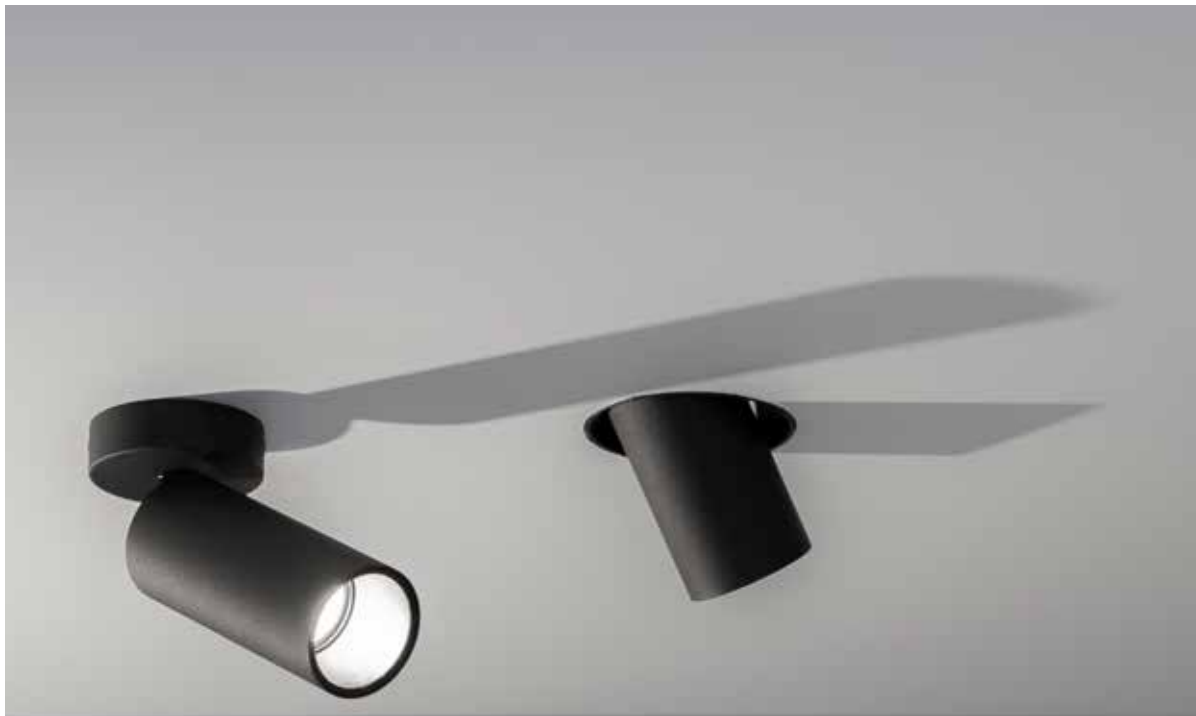

SPY 52

The most extensive member within the Spy family: different installation methods, multiple light refining accessories to be added for single or double use, mid- and high-power LEDs and even the possibility to opt for Soft Dim or Tunable White. Containing a more powerful LED engine than Spy 39, Spy 52 has the same elegant ratio of diameter versus length. Combined with the Ex-centric Rotation System to swivel around, Spy ST presents itself like a curious object peeking from the ceiling, able to spy up to 350° around the room. Requiring only 35mm of recessed depth, the Clip version of the Spy 52 combines easy installation together with a clean ceiling appearance and lots of functionality. Similar as for Spy 39 On, single, double and even triple luminaire heads can be combined in a surface mounted solution. These also have a custom designed power supply inside to create an ultra-minimalistic housing. To complete the family Spy 52 is available with a Soft Dim or Tunable White LED inside. A Soft Dim version offers the cosy feeling of halogen when dimming down, changing the colour temperature into a warm glow of light. Tunable White allows you to change the type of white to your preference, from warm up to very cold white.

www.deltalight.com/spy-52



SPY 52

CHOOSE YOUR COLOUR



Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White



Front tube in
Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

CHOOSE YOUR INSTALLATION

Recessed
With trim / Trimless

Semi-recessed

Surface mounted
Single / Double / Triple

CHOOSE YOUR POWER

8,6W up to 12,4W – 1090 up to 1470lm

CHOOSE YOUR LED COLOUR

2700K / 3000K / Soft Dim /
Tunable White

CHOOSE YOUR OPTICS

20° / 45°

CHOOSE YOUR ACCESSORY

Honeycomb / Glass SBL / Linear Spread
Lens / Softening Lens / Spread Lens





SPY 66

Spy 66 offers a range of optics to create multiple beam angles within different output levels. Ranging up to 24,6W, Spy 66 is available as Clip and On version, allowing an easy installation. With 3 beam angles in standard white LED colours and Tunable White, Spy 66 is perfect to apply in retail and public environments.

www.deltalight.com/spy-66

SPY 66

CHOOSE YOUR COLOUR



Black / White



Front tube in
Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

CHOOSE YOUR INSTALLATION

Semi-recessed

Surface mounted

CHOOSE YOUR POWER

17,1W up to 24,6W – 2130 up to 2910lm

CHOOSE YOUR LED COLOUR

2700K / 3000K / Tunable White

CHOOSE YOUR OPTICS

18° / 30° / 45°

CHOOSE YOUR ACCESSORY

Honeycomb / Glass SBL / Linear Spread
Lens / Softening Lens / Spread Lens



SPY 90

Spy 90 On is the surface mounted Spy solution for high output and ultimate performance, as it has an integrated dimmable driver inside. In line with the complete Spy range, the tubular design can be finished with the coloured insert of your choice, but Spy 90 On especially wows you with its output up to 3200lm and its choice of 3 different beam angles.

www.deltalight.com/spy-90

SPY 90

CHOOSE YOUR COLOUR



Black / White



Front tube in
Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

INSTALLATION

Surface mounted

POWER

23,2W – 3170lm

CHOOSE YOUR LED COLOUR

2700K / 3000K

CHOOSE YOUR OPTICS

18° / 30° / 45°

CHOOSE YOUR ACCESSORY

Honeycomb / Glass SBL / Linear Spread
Lens / Softening Lens / Spread Lens

CONTROL

1-10V Dim

MICROSPY

This miniature range offers fix and adjustable recessed luminaires, with and without trim, in a spot or flood beam angle. The trimless versions of Microspy make use of the Snap-In principle, facilitating installation as the frame can be placed in advance and light modules can be added in a finishing stage. As a pendant module its slenderness allows you to create playful or humble set-ups by grouping multiple luminaires or choosing just one single pendant.

www.deltalight.com/microspy



MICROSPY

CHOOSE YOUR COLOUR

● ○
Black / White

CHOOSE YOUR INSTALLATION

Recessed
With trim / Trimless
Suspended

CHOOSE YOUR POWER

3,9W up to 7,1W – 390 up to 810lm

CHOOSE YOUR LED COLOUR

2700K / 3000K

CHOOSE YOUR OPTICS

15° / 24° / 30°



SPY / SPY FOCUS

CHOOSE YOUR COLOUR



Black / Flemish Bronze /
Flemish Gold / White



Front tube in
Black / Flemish Bronze / Flemish Gold /
Gold Matt / Silver Grey / White

CHOOSE YOUR INSTALLATION

Semi-recessed

Surface mounted

Suspended

CHOOSE YOUR

LIGHT SOURCE & POWER

LED

6,1W up to 10,4W – 780 up to 1130lm

GU10

CHOOSE YOUR LED COLOUR

2700K / 3000K

CHOOSE YOUR OPTICS

33° / Focus 8° to 43°

SPY

As a straightforward downlight, Spy is available for direct ceiling fixation or as a pendant, ideal to create a powerful and striking light effect. With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body. As such, every beam angle between 8° and 43° is possible.

www.deltalight.com/spy





SPY TRACK

On track, Spy is available in diameters of 52, 66 or 90 millimeters, ranging from 1500 up to 4600lm for several lighting purposes. For specific project demands, Spy offers Soft Dim and Tunable White solutions in different beam angles, ideal to create a particular mood or cosy atmospheres.

www.deltalight.com/spy-track

FAMILY OVERVIEW

CHOOSE YOUR COLOUR



Black / White



Front tube in

Black / Flemish Bronze / Flemish Gold /
Gold Coloured / White

CHOOSE YOUR INSTALLATION

Adapter on Track
Adapter in Track

CHOOSE YOUR SIZE & POWER

Spy 52
12,4W – 1460lm
—
Spy 66
9W up to 24,6W – 1076 up to 2910lm
—
Spy 90
23,2W up to 36W – 3170 up to 4600lm
—
Spy Focus
9W up to 17,1W – 1080 up to 2130lm

CHOOSE YOUR LED COLOUR

2700K / 3000K / Soft Dim / Tunable White

CHOOSE YOUR OPTICS

Spy 52
20° / 45°
—
Spy 66
12° / 18° / 26° / 30° / 33° / 39° / 45°
—
Spy 90
18° / 30° / 45°
—
Spy Focus
8 to 43° / 15 to 50°

CHOOSE YOUR CONTROL

Non Dim / DALI Dim

CHOOSE YOUR FAVORITE TRACK

Recessed
Surface mounted
Suspended



SPY ON PROFILES

Spy is also available as add-on for most the profiles in the Delta Light range. The smaller Spy 27 and 39 are a perfect fit for the miniature profiles like Splitline 14, Shiftline 19 and Tagline, while the bigger versions of Spy are also available as modules on our magnetic profile range, as cove lighting within the Split It Pro range and for accent lighting within the Streamliner range.

**PEEKING AROUND,
SHINING MY LIGHT.**



HOSPITALITY

SPLIT-IT PRO + SPY 52



SAAL.CO

OFFICE

SPLITLINE 14 + SPY 39



GALLERY

SHIFTLINE M26 L MATRIX + SPY 52



RESIDENTIAL

SPY 52 TRIMLESS



OFFICE

SPY 52 TRIMLESS





MANIA-K

RETAIL

SPY 66 CLIP



GALLERY


SPY 66 ADM



INTERIOR ARCHITECTURE BY @AFC-COLLECTION

RESIDENTIAL

SPY 52 ON

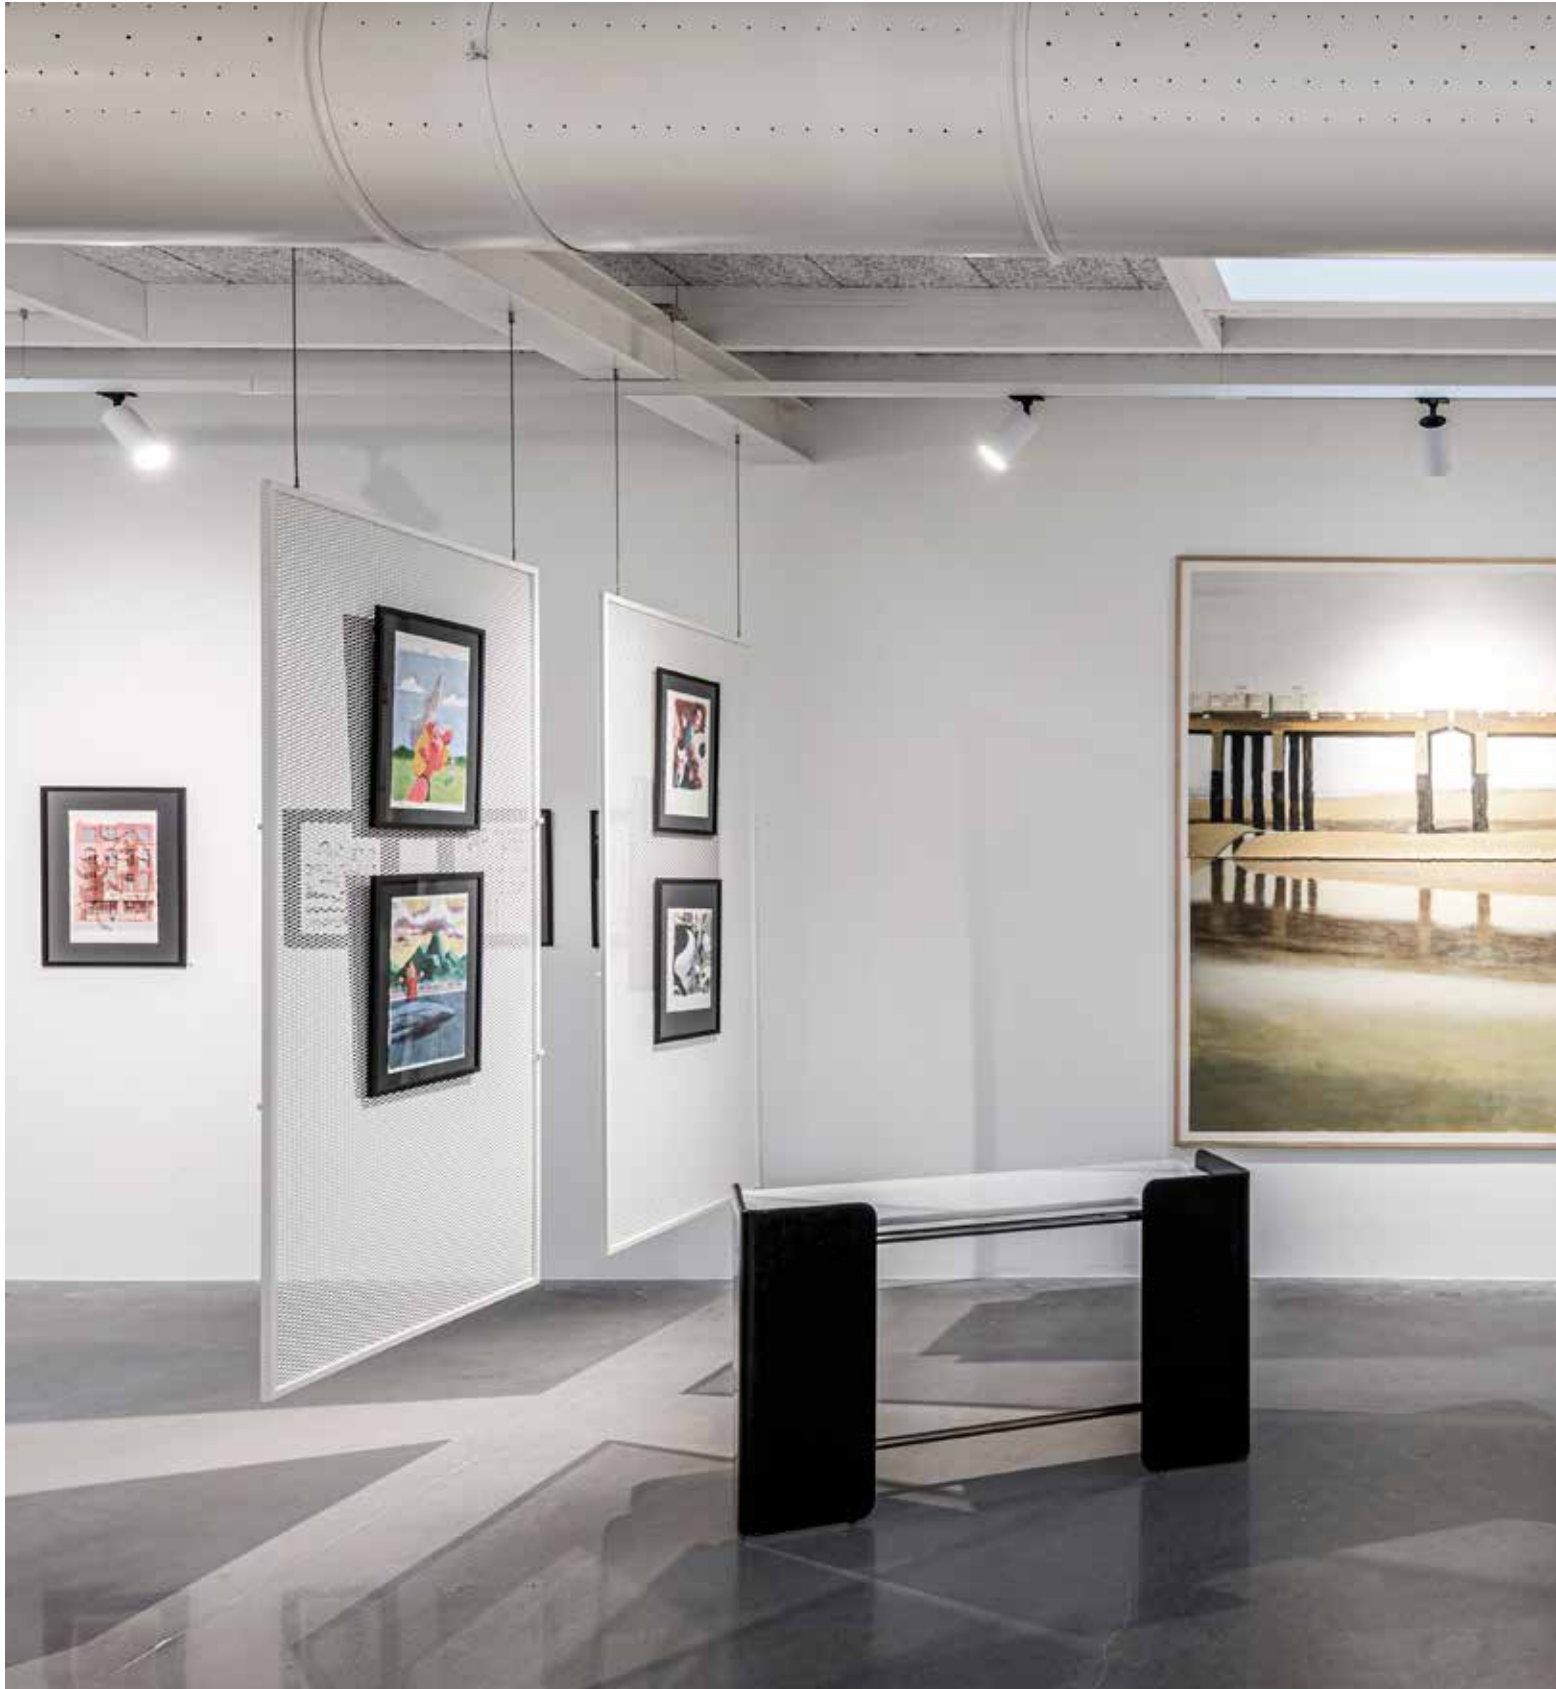

HUBERTY BREYNE GALLERY

GALLERY

SPY 90 ADM



INTERIOR DESIGN MAISTER


RETAIL

SPY 66 CLIP

**TECHNICAL
INFO**

SPY 27


SPY 27 CLIP



41 x 40

3000K / CRI>90	2700K / CRI>90
LED [U] 5.8W / 787lm / 350mA	LED [U] 5.8W / 753lm / 350mA
30°	
24118 9320 ◊	24118 9220 ◊
◊ B-B / FBR-B / FG-B / GC-B / W-W	
◊ [0,2] IP20	


SPY 27 L CLIP



41 x 40

3000K / CRI>90	2700K / CRI>90
LED [U] 5.8W / 787lm / 350mA	LED [U] 5.8W / 753lm / 350mA
30°	
24133 9320 ◊	24133 9220 ◊
◊ B-B / FBR-B / FG-B / GC-B / W-W	
◊ [0,2] IP20	


SPY 27 ON



41 x 40

3000K / CRI>90	2700K / CRI>90
LED 5.8W / 787lm / 350mA	LED 5.8W / 753lm / 350mA
MAINS DIMMING (FE)	
30°	
24119 9328 ◊	24119 9228 ◊
◊ B-B / B-GC / W-W	
220-240V / 50-60Hz	
◊ [0,6] IP20	


SPY 27 2 ON



41 x 40

3000K / CRI>90	2700K / CRI>90
2x LED 5.8W / 787lm / 350mA	2x LED 5.8W / 753lm / 350mA
MAINS DIMMING (FE)	
30°	
24120 9328 ◊	24120 9228 ◊
◊ B-B / B-GC / W-W	
220-240V / 50-60Hz	
◊ [0,8] IP20	

SPY 27 L 4 ON



41 x 40

3000K / CRI>90	2700K / CRI>90
4x LED 5.8W / 787lm / 350mA	4x LED 5.8W / 753lm / 350mA
MAINS DIMMING (FE)	
30°	
24145 9328 ◊	24145 9228 ◊
◊ B-B / W-W	
220-240V / 50-60Hz	
◊ [1,4] IP20	



SPY 27 + VISOR 27

REQUIREMENTS

LED POWER SUPPLY (only for CLIP version) ► all info on deltalight.com

ACCESSORIES


VISOR 27 ► 24144 0040 B



R / REQUIREMENTS (• = APPLICABLE)
O / OPTIONS (• = APPLICABLE)
A / ACCESSORIES (NO • = NOT APPLICABLE)

SPY 39

SPY 39 TRIMLESS




ØKIT x 80

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24121 9320 ◇	24121 9330 ◇	24121 9220 ◇	24121 9230 ◇

◇ B / FBR / FG / GC / W

0,3 IP20

SPY 39 ST




98 x 80 / max.25

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24142 9320 ◇	24142 9330 ◇	24142 9220 ◇	24142 9230 ◇

◇ W-W

0,6 IP20

SPY 39 TRIMLESS IN



ØKIT x 130


3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24123 9320 ◇	24123 9330 ◇	24123 9220 ◇	24123 9230 ◇

◇ B / FBR / FG / GC / W

0,4 IP20

REQUIREMENTS

MOUNTING KIT SPY 39/52 TRIMLESS O.F.A. ► **15212 2030** (for spy 39 trimless)
or MOUNTING KIT SPY 39/52 TRIMLESS C.S.C. ► **15212 0080** (for spy 39 trimless)
or MOUNTING KIT SPY 39/52 TRIMLESS W.S.C. ► **15212 0160** (for spy 39 trimless)
MOUNTING KIT SPY 39 TRIMLESS IN ► **24144 0050** (for spy 39 trimless IN)
SPY 39 TUBE ◇ ► **24144 0010** B / FBR / FG / GC / W
LED POWER SUPPLY ► all info on deltalight.com




ACCESSORIES

VISOR 39 ► **24144 0030** B

SPY 39

SPY 39 CLIP




41 x 40

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24125 9320 ◇	24125 9330 ◇	24125 9220 ◇	24125 9230 ◇

◇ B-B / FBR-B / FG-B / GC-B / W-W

0,3 IP20

SPY 39 L CLIP




41 x 40

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24134 9320 ◇	24134 9330 ◇	24134 9220 ◇	24134 9230 ◇

◇ B-B / FBR-B / FG-B / GC-B / W-W

0,4 IP20

SPY 39 ON




41 x 40

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24127 9320 ◇	24127 9330 ◇	24127 9220 ◇	24127 9230 ◇

◇ B / FBR / FG / GC / W

0,4 IP20

SPY 39 L ON



41 x 40

3000K / CRI>90		2700K / CRI>90	
LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	
20°	40°	20°	40°
24136 9320 ◇	24136 9330 ◇	24136 9220 ◇	24136 9230 ◇

◇ B / FBR / FG / GC / W

0,5 IP20



SPY 39 L



SPY 39 ON 2

REQUIREMENTS

SPY 39 TUBE ◇ ▶ **24144 0010** B / FBR / FG / GC / W
 SPY 39 L TUBE ◇ ▶ **24144 0020** B / FBR / FG / GC / W
 LED POWER SUPPLY (only for CLIP version) ▶ all info on deltalight.com

OPTIONS

COVERSET R ◇ (Ø 62) ▶ **204 00 62** ANO / B / W (for spy 39 ON)
 COVERSET R ◇ (Ø 90) ▶ **204 00 90** ANO / B / W (for spy 39 ON)
 COVERSET R ◇ (Ø100) ▶ **204 00 100** ANO / B / W (for spy 39 ON)


ACCESSORIES

VISOR 39 ▶ **24144 0030** B

ROA R / REQUIREMENTS (• = APPLICABLE)
 O / OPTIONS (• = APPLICABLE)
 A / ACCESSORIES (NO • = NOT APPLICABLE)


SPY 39

SPY 39 ON 1




3000K / CRI>90		2700K / CRI>90	
LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *		LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *	
MAINS DIMMING (FE)			
20°	40°	20°	40°
24129 9328 ◇	24129 9338 ◇	24129 9228 ◇	24129 9238 ◇
◇ B-B / W-W			
220-240V / 50-60Hz			
◇ 0,5 IP20			

SPY 39 L ON 1




3000K / CRI>90		2700K / CRI>90	
LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *		LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *	
MAINS DIMMING (FE)			
20°	40°	20°	40°
24138 9328 ◇	24138 9338 ◇	24138 9228 ◇	24138 9238 ◇
◇ B-B / W-W			
220-240V / 50-60Hz			
◇ 0,6 IP20			

SPY 39 ON 2




3000K / CRI>90		2700K / CRI>90	
2x LED 5.8W / 787lm / 350mA * 2x LED 8.6W / 1089lm / 500mA *		2x LED 5.8W / 753lm / 350mA * 2x LED 8.6W / 1041lm / 500mA *	
MAINS DIMMING (FE)			
20°	40°	20°	40°
24130 9328 ◇	24130 9338 ◇	24130 9228 ◇	24130 9238 ◇
◇ B-B / W-W			
220-240V / 50-60Hz			
◇ 0,8 IP20			

SPY 39 L ON 2



3000K / CRI>90		2700K / CRI>90	
2x LED 5.8W / 787lm / 350mA * 2x LED 8.6W / 1089lm / 500mA *		2x LED 5.8W / 753lm / 350mA * 2x LED 8.6W / 1041lm / 500mA *	
MAINS DIMMING (FE)			
20°	40°	20°	40°
24140 9328 ◇	24140 9338 ◇	24140 9228 ◇	24140 9238 ◇
◇ B-B / W-W			
220-240V / 50-60Hz			
◇ 1,0 IP20			

MICROSPY 39 C



3000K / CRI>90		2700K / CRI>90	
7.1W / 812lm / 350mA		7.1W / 779lm / 350mA	
24°			
279 773 811 931 ◇		279 773 811 921 ◇	
◇ B / W			
110-240V / 50-60Hz			
INCL.1 x CABLE 2 x 0.75mm ² / 1.6m			
◇ 0,9 IP20			

REQUIREMENTS

SPY 39 TUBE ◇ ▶ **24144 0010** B / FBR / FG / GC / W
SPY 39 L TUBE ◇ ▶ **24144 0020** B / FBR / FG / GC / W


ACCESSORIES

VISOR 39 ▶ **24144 0030** B

*Selection by DIP switch on internal driver


SPY

SPY C




3000K / CRI>90	2700K / CRI>90
7.1W / 812lm / 350mA	7.1W / 779lm / 350mA
MAINS DIMMING (FE)	
33°	
279 776 811 932 ED8 ◊	279 776 811 922 ED8 ◊
◊ B / W	
220-240V / 50-60Hz	
INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m INCL. 1 x CABLE 2 x 0.75mm ²	
◊ 1,1 IP20	

SPY S



3000K / CRI>90	2700K / CRI>90
LED 10.4W / 1128lm / 500mA	LED 10.4W / 1083lm / 500mA
MAINS DIMMING (FE)	
33°	
19876 9328 ◊	19876 9228 ◊
◊ B / W	
220-240V / 50-60Hz	
◊ 0,5 IP20	

SPY ON HI



QPAR51 max.35W
414 62 00 ◊
◊ B / W
GU10 / 100-240V / 50-60Hz
◻ 0,5 IP20 ◻ 0,5

REQUIREMENTS

SPY TUBE ◊ ▶ **414 01 00** B / FBR / FG / MMAT / SG / W

OPTIONS

CONNECTION TRIMLESS ▶ **328 10 03** (for microscopy 39 C)
 CONNECTION ST ▶ **15225 0360** B / W (for microscopy 39 C)
 SUSPENSION + CONNECTION TRIMLESS ▶ **328 10 02** (for spy C)
 COVERSET R ◊ (Ø 90) ▶ **204 00 90** ANO / B / W (for spy C)
 COVERSET R ◊ (Ø100) ▶ **204 00 100** ANO / B / W (for spy C)

ACCESSORIES


HONEYCOMB 50 ▶ **413 03 01** B
 LINEAR SPREAD LENS 50 ▶ **413 03 02**
 SPREAD LENS 50 ▶ **413 03 03**
 SOFTENING LENS 50 ▶ **413 03 04**
 GLASS SBL 50 ▶ **413 03 05**



R / REQUIREMENTS (• = APPLICABLE)
 O / OPTIONS (• = APPLICABLE)
 A / ACCESSORIES (NO • = NOT APPLICABLE)


SPY 52

SPY 52 ADM



NON DIM			
3000K / CRI>90 LED 12.4W / 1467lm / 700mA		2700K / CRI>90 LED 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19834 9320 ◇	19834 9330 ◇	19834 9220 ◇	19834 9230 ◇
◇ B / W			
220-240V / 50-60Hz			
<input type="checkbox"/> 0.5 IP20			
DALI DIM			
3000K / CRI>90 LED 12.4W / 1467lm / 700mA		2700K / CRI>90 LED 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19834 9325 ◇	19834 9335 ◇	19834 9225 ◇	19834 9235 ◇
DALI DIM		DALI DIM (DT8)	
3000-1800K / CRI>90 LED 9W / 945lm / 250mA		6500-2700K / CRI>90 LED 9W / 1087lm / 500mA	
20°	45°	20°	45°
19835 9025 ◇	19835 9035 ◇	19881 9025 ◇	19881 9035 ◇
◇ B / W			
220-240V / 50-60Hz			
<input type="checkbox"/> 0.5 IP20			

SPY 52 ADM SLIM



NON DIM			
3000K / CRI>90 LED 12.4W / 1467lm / 700mA		2700K / CRI>90 LED 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19836 9320 ◇	19836 9330 ◇	19836 9220 ◇	19836 9230 ◇
◇ B / W			
220-240V / 50-60Hz			
<input type="checkbox"/> 0.5 IP20			
3000K / CRI>90		2700K / CRI>90	
DALI DIM			
LED 12.4W / 1467lm / 700mA		LED 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19836 9325 ◇	19836 9335 ◇	19836 9225 ◇	19836 9235 ◇
DALI DIM			
3000-1800K / CRI>90 LED 9W / 945lm / 250mA			
20°	45°		
19837 9025 ◇	19837 9035 ◇		
◇ B / W			
220-240V / 50-60Hz			
<input type="checkbox"/> 0.5 IP20			

REQUIREMENTS

TRACK 3F DIM IN / ON / H ▶ all info on deltalight.com
 SPY 52 TUBE ◇ ▶ **19810 0100** B / FBR / FG / GC / W

OPTIONS


INTERCHANGEABLE REFLECTORS:
 20° ▶ **19810 0180**
 45° ▶ **19810 0190**

ACCESSORIES

HONEYCOMB 50 (max 500mA) ▶ **413 03 01 B**
 LINEAR SPREAD LENS 50 (max 500mA) ▶ **413 03 02**
 SPREAD LENS 50 (max 500mA) ▶ **413 03 03**
 SOFTENING LENS 50 (max 500mA) ▶ **413 03 04**
 GLASS SBL 50 (max 500mA) ▶ **413 03 05**

SPY 52

SPY 52 TRIMLESS



ROA

ØKIT x 80

3000K / CRI>90		2700K / CRI>90	
LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA		LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19811 9320 ◊	19811 9330 ◊	19811 9220 ◊	19811 9230 ◊

◊ B / FBR / FG / GC / W

III 0,4 IP20




3000-1800K / CRI>90		6500-2700K / CRI>90	
LED [X] 9W / 945lm / 250mA		LED [Y] 9W / 1087lm / 500mA	
20°	45°	20°	45°
19812 9020 ◊	19812 9030 ◊	19813 9020 ◊	19813 9030 ◊

◊ B / FBR / FG / GC / W

◊ B / W

III 0,4 IP20

SPY 52 ST



ROA

98 x 80 / max.25

3000K / CRI>90		2700K / CRI>90	
LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA		LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19814 9320 ◊	19814 9330 ◊	19814 9220 ◊	19814 9230 ◊

◊ W-W

III 0,7 IP20




3000-1800K / CRI>90		6500-2700K / CRI>90	
LED [X] 9W / 945lm / 250mA		LED [Y] 9W / 1087lm / 500mA	
20°	45°	20°	45°
19815 9020 ◊	19815 9030 ◊	19816 9020 ◊	19816 9030 ◊

◊ W-W

III 0,7 IP20

SPY 52 TRIMLESS +
MOUNTING KIT R102 TRIMLESS OFA IN CONCRETE



SPY 52 TRIMLESS

REQUIREMENTS

MOUNTING KIT SPY 39/52 TRIMLESS O.F.A. ▶ **15212 2030** (for spy 52 trimless)
or MOUNTING KIT SPY 39/52 TRIMLESS C.S.C. ▶ **15212 0080** (for spy 52 trimless)
or MOUNTING KIT SPY 39/52 TRIMLESS W.S.C. ▶ **15212 0160** (for spy 52 trimless)
SPY 52 TUBE ◊ ▶ **19810 0100** B / FBR / FG / GC / W
LED POWER SUPPLY ▶ all info on deltaight.com

ACCESSORIES


HONEYCOMB 42 (max 500mA) ▶ **19810 0010** B (Single Use) / **19810 0060** B (Double Use)
LINEAR SPREAD LENS 42 (max 500mA) ▶ **19810 0020**
SPREAD LENS 42 (max 500mA) ▶ **19810 0030**
SOFTENING LENS 42 ▶ **19810 0040**
GLASS SBL 42 (max 500mA) ▶ **19810 0050**



R / REQUIREMENTS (• = APPLICABLE)
O / OPTIONS (• = APPLICABLE)
A / ACCESSORIES (NO • = NOT APPLICABLE)

SPY 52


SPY 52 CLIP



50 x 40

3000K / CRI>90		2700K / CRI>90	
LED [J] 8.6W / 1089lm / 500mA LED [J] 12.4W / 1467lm / 700mA		LED [J] 8.6W / 1041lm / 500mA LED [J] 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19820 9320 ◇	19820 9330 ◇	19820 9220 ◇	19820 9230 ◇
◇ B-B / FBR-B / FG-B / GC-B / W-W			
◇ 0,5 IP20			
3000-1800K / CRI>90		6500-2700K / CRI>90	
LED [X] 9W / 945lm / 250mA		LED [Y] 9W / 1087lm / 500mA	
20°	45°	20°	45°
19821 9020 ◇	19821 9030 ◇	19822 9020 ◇	19822 9030 ◇
◇ B-B / FBR-B / FG-B / GC-B / W-W		◇ B-B / W-W	
◇ 0,5 IP20			

SPY 52 ON



3000K / CRI>90		2700K / CRI>90	
LED [J] 8.6W / 1089lm / 500mA LED [J] 12.4W / 1467lm / 700mA		LED [J] 8.6W / 1041lm / 500mA LED [J] 12.4W / 1403lm / 700mA	
20°	45°	20°	45°
19823 9320 ◇	19823 9330 ◇	19823 9220 ◇	19823 9230 ◇
◇ B / FBR / FG / GC / W			
◇ 0,5 IP20			
3000-1800K / CRI>90		6500-2700K / CRI>90	
LED [X] 9W / 945lm / 250mA		LED [Y] 9W / 1087lm / 500mA	
20°	45°	20°	45°
19824 9020 ◇	19824 9030 ◇	19825 9020 ◇	19825 9030 ◇
◇ B / FBR / FG / GC / W		◇ B / W	
◇ 0,5 IP20			

REQUIREMENTS

SPY 52 TUBE ◇ ▶ **19810 0100** B / FBR / FG / GC / W
LED POWER SUPPLY ▶ all info on deltalight.com

OPTIONS


MOUNTING KIT FLUSH SPY ▶ **414 90 01** (for spy 52 CLIP)
COVERSET R ◇ (Ø 62) ▶ **204 00 62** ANO / B / W (for spy 52 ON)
COVERSET R ◇ (Ø 90) ▶ **204 00 90** ANO / B / W (for spy 52 ON)
COVERSET R ◇ (Ø100) ▶ **204 00 100** ANO / B / W (for spy 52 ON)

ACCESSORIES

HONEYCOMB 42 ▶ **19810 0010** B (Single Use) / **19810 0060** B (Double Use)
LINEAR SPREAD LENS 42 ▶ **19810 0020**
SPREAD LENS 42 ▶ **19810 0030**
SOFTENING LENS 42 ▶ **19810 0040**
GLASS SBL 42 ▶ **19810 0050**


SPY 52

SPY 52 ON 1




3000K / CRI>90		2700K / CRI>90		3000-1800K / CRI>90	
LED 5.8W / 787lm / 350mA *		LED 5.8W / 753lm / 350mA *		LED 6W / 623lm / 350mA	
LED 8.6W / 1089lm / 500mA*		LED 8.6W / 1041lm / 500mA*			
MAINS DIMMING (FE)					
20°	45°	20°	45°	20°	45°
19826 9328 ◊	19826 9338 ◊	19826 9228 ◊	19826 9238 ◊	19831 9028 ◊	19831 9038 ◊
◊ B-B / W-W					
220-240V / 50-60Hz					
◊ 0,7 IP20					

SPY 52 ON 2



3000K / CRI>90		2700K / CRI>90		3000-1800K / CRI>90	
2x LED 5.8W / 787lm / 350mA *		2x LED 5.8W / 753lm / 350mA *		2x LED 6W / 623lm / 350mA	
2x LED 8.6W / 1089lm / 500mA*		2x LED 8.6W / 1041lm / 500mA*			
MAINS DIMMING (FE)					
20°	45°	20°	45°	20°	45°
19827 9328 ◊	19827 9338 ◊	19827 9228 ◊	19827 9238 ◊	19832 9028 ◊	19832 9038 ◊
◊ B-B / W-W					
220-240V / 50-60Hz					
◊ 1,0 IP20					

SPY 52 ON 3



3000K / CRI>90		2700K / CRI>90	
3x LED 5.8W / 787lm / 350mA *		3x LED 5.8W / 753lm / 350mA *	
3x LED 8.6W / 1089lm / 500mA*		3x LED 8.6W / 1041lm / 500mA*	
MAINS DIMMING (FE)			
20°	45°	20°	45°
19828 9328 ◊	19828 9338 ◊	19828 9228 ◊	19828 9238 ◊
◊ B-B / W-W			
220-240V / 50-60Hz			
◊ 1,5 IP20			

REQUIREMENTS

SPY 52 TUBE ◊ ▶ **19810 0100** B / FBR / FG / GC / W (1x/led)

ACCESSORIES

HONEYCOMB 42 ▶ **19810 0010** B (Single Use) / **19810 0060** B (Double Use)

LINEAR SPREAD LENS 42 ▶ **19810 0020**

SPREAD LENS 42 ▶ **19810 0030**

SOFTENING LENS 42 ▶ **19810 0040**

GLASS SBL 42 ▶ **19810 0050**


*Selection by DIP switch on internal driver



R / REQUIREMENTS (• = APPLICABLE)
O / OPTIONS (• = APPLICABLE)
A / ACCESSORIES (NO • = NOT APPLICABLE)

SPY 66

SPY 66 CLIP



50 x 40

3000K / CRI>90			2700K / CRI>90		
LED [R] 17.1W / 2125lm / 500mA			LED [R] 17.1W / 2068lm / 500mA		
LED [R] 24.6W / 2907lm / 700mA			LED [R] 24.6W / 2829lm / 700mA		
18°	30°	45°	18°	30°	45°
24621 9310 ◇	24621 9320 ◇	24621 9330 ◇	24621 9210 ◇	24621 9220 ◇	24621 9230 ◇

◇ = B-B / W-W

0.6 IP20




6500-2700K / CRI>90		
LED [Y] 9W / 1087lm / 500mA		
18°	30°	45°
24622 9010 ◇	24622 9020 ◇	24622 9030 ◇

◇ = B-B / W-W

0.6 IP20

SPY 66 ON



3000K / CRI>90			2700K / CRI>90		
LED [R] 17.1W / 2125lm / 500mA			LED [R] 17.1W / 2068lm / 500mA		
LED [R] 24.6W / 2907lm / 700mA			LED [R] 24.6W / 2829lm / 700mA		
18°	30°	45°	18°	30°	45°
24623 9310 ◇	24623 9320 ◇	24623 9330 ◇	24623 9210 ◇	24623 9220 ◇	24623 9230 ◇

◇ = B / W

0.7 IP20



6500-2700K / CRI>90		
LED [Y] 9W / 1087lm / 500mA		
18°	30°	45°
24624 9010 ◇	24624 9020 ◇	24624 9030 ◇

◇ = B / W

0.7 IP20

REQUIREMENTS


SPY 66 TUBE ◇ ▶ **24611 0100** B / FBR / FG / GC / W
LED POWER SUPPLY (only for CLIP version) ▶ all info on deltalight.com

ACCESSORIES


HONEYCOMB 50 (max 700mA) ▶ **413 03 01** B
LINEAR SPREAD LENS 50 (max 500mA) ▶ **413 03 02**
SPREAD LENS 50 (max 500mA) ▶ **413 03 03**
SOFTENING LENS 50 (max 500mA) ▶ **413 03 04**
GLASS SBL 50 (max 500mA) ▶ **413 03 05**

SPY 66

SPY 66 LP ADM




NON DIM			
3000K / CRI>90		2700K / CRI>90	
LED 9W / 1076lm / 500mA		LED 9W / 1067lm / 500mA	
12°	33°	12°	33°
24610 9310 ◊	24610 9330 ◊	24610 9210 ◊	24610 9230 ◊
◊ = B / W			
220-240V / 50-60Hz			
◊ 0,6 IP20			




DALI DIM			
3000K / CRI>90		2700K / CRI>90	
LED 9W / 1076lm / 500mA		LED 9W / 1067lm / 500mA	
12°	33°	12°	33°
24610 9315 ◊	24610 9335 ◊	24610 9215 ◊	24610 9235 ◊
◊ = B / W			
220-240V / 50-60Hz			
◊ 0,7 IP20			

SPY 66 MP ADM



NON DIM					
3000K / CRI>90			2700K / CRI>90		
LED 17.1W / 2125lm / 500mA			LED 17.1W / 2068lm / 500mA		
18°	26° **	39° *	18°	26° **	39° *
24612 9310 ◊	24612 9320 ◊	24612 9330 ◊	24612 9210 ◊	24612 9220 ◊	24612 9230 ◊
◊ = B / W					
220-240V / 50-60Hz					
◊ 0,6 IP20					



DALI DIM					
3000K / CRI>90			2700K / CRI>90		
LED 17.1W / 2125lm / 500mA			LED 17.1W / 2068lm / 500mA		
18°	26° **	39° *	18°	26° **	39° *
24612 9315 ◊	24612 9325 ◊	24612 9335 ◊	24612 9215 ◊	24612 9225 ◊	24612 9235 ◊
◊ = B / W					
220-240V / 50-60Hz					
◊ 0,7 IP20					

REQUIREMENTS

TRACK 3F DIM IN / ON / H ▶ all info on deltalight.com
 SPY 66 LP/MP TUBE ◊ ▶ **24611 0010** B / MMAT / W

ACCESSORIES


HONEYCOMB 57 ▶ **24611 0150** B (Single Use)
 HONEYCOMB 57 ▶ **24611 0210** B (Double Use)
 LINEAR SPREAD LENS 57 (max 500mA) ▶ **24611 0170**
 SPREAD LENS 57 (max 500mA) ▶ **24611 0200**
 SOFTENING LENS 57 (max 500mA) ▶ **24611 0190**
 GLASS SBL 57 (max 500mA) ▶ **24611 0160**

* ONLY HONEYCOMB

** NO LINEAR SPREAD LENS


SPY 90

SPY 90 ADM




NON DIM					
3000K / CRI>90			2700K / CRI>90		
LED 36W / 4592lm / 1050mA					
18°	30°	45°	18°	30°	45°
19883 9310 ◊	19883 9320 ◊	19883 9330 ◊	19883 9210 ◊	19883 9220 ◊	19883 9230 ◊
◊ B / W					
220-240V / 50-60Hz					
□ 1,4 IP20					

SPY 90 ADM DIM1



1-10V DIM					
3000K / CRI>90			2700K / CRI>90		
LED 23.2W / 3169lm / 700mA					
18°	30°	45°	18°	30°	45°
19883 9311 ◊	19883 9321 ◊	19883 9331 ◊	19883 9211 ◊	19883 9221 ◊	19883 9231 ◊
◊ B / W					
120-240V / 50-60Hz					
□ 1,4 IP20					

SPY 90 ADM DIMS




DALI DIM					
3000K / CRI>90			2700K / CRI>90		
LED 36W / 4592lm / 1050mA					
18°	30°	45°	18°	30°	45°
19883 9315 ◊	19883 9325 ◊	19883 9335 ◊	19883 9215 ◊	19883 9225 ◊	19883 9235 ◊
◊ B / W					
220-240V / 50-60Hz					
□ 1,4 IP20					



DALI DIM (DT8) (L = 259mm)					
6500-2700K / CRI>90					
LED 17.8W / 2054lm / 500mA					
18°	30°	45°			
19884 9015 ◊	19884 9025 ◊	19884 9035 ◊			
◊ = B / W					
220-240V / 50-60Hz					
□ 1,4 IP20					

SPY 90 ON



3000K / CRI>90			2700K / CRI>90		
23.2W / 3169lm / 700mA					
1-10V DIM					
18°	30°	45°	18°	30°	45°
19882 9311 ◊	19882 9321 ◊	19882 9331 ◊	19882 9211 ◊	19882 9221 ◊	19882 9231 ◊
◊ B / W					
120-240V / 50-60Hz					
□ 1,3 IP20					

REQUIREMENTS

SPY 90 TUBE ◊ ▶ 19810 0170 B / FBR / FG / GC / W
TRACK 3F DIM IN / ON / H ▶ all info on deltalight.com

OPTIONS

INTERCHANGEABLE REFLECTORS:

18° ▶ 19810 0200

30° ▶ 19810 0210

45° ▶ 19810 0220

ACCESSORIES

HONEYCOMB 75 ▶ 19810 0110 B (Single Use)


HONEYCOMB 75 ▶ 19810 0120 B (Double Use)

LINEAR SPREAD LENS 75 ▶ 19810 0120

SPREAD LENS 75 ▶ 19810 0160

SOFTENING LENS 75 ▶ 19810 0150


GLASS SBL 75 ▶ 19810 0130

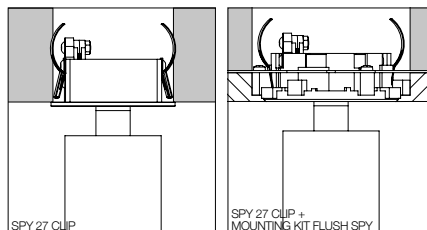

ROA R / REQUIREMENTS (• = APPLICABLE)
O / OPTIONS (• = APPLICABLE)
A / ACCESSORIES (NO • = NOT APPLICABLE)


SPY FOCUS

SPY FOCUS CLIP LP




50 x 40

3000K / CRI>90 LED [Q] 6.1W / 775lm / 350mA LED [Q] 9W / 1076lm / 500mA	2700K / CRI>90 LED [Q] 6.1W / 768lm / 350mA LED [Q] 9W / 1067lm / 500mA
8-43°	
19877 9300 ◊	19877 9200 ◊
◊ B-B / FBR-B / FG-B / W-B / W-W	




0,4 IP20

SPY FOCUS CLIP MP




50 x 40

3000K / CRI>90 LED [R] 11.7W / 1522lm / 350mA LED [R] 17.1W / 2125lm / 500mA	2700K / CRI>90 LED [R] 11.7W / 1481lm / 350mA LED [R] 17.1W / 2068lm / 500mA
12-45°	
19873 9300 ◊	19873 9200 ◊
◊ B-B / FBR-B / FG-B / W-B / W-W	




0,4 IP20

SPY FOCUS ON LP




50 x 40

3000K / CRI>90 LED [Q] 6.1W / 775lm / 350mA LED [Q] 9W / 1076lm / 500mA	2700K / CRI>90 LED [Q] 6.1W / 768lm / 350mA LED [Q] 9W / 1067lm / 500mA
8-43°	
19878 9300 ◊	19878 9200 ◊
◊ B / FBR / FG / W	




0,5 IP20

SPY FOCUS ON MP



50 x 40

3000K / CRI>90 LED [R] 11.7W / 1522lm / 350mA LED [R] 17.1W / 2125lm / 500mA	2700K / CRI>90 LED [R] 11.7W / 1481lm / 350mA LED [R] 17.1W / 2068lm / 500mA
12-45°	
19874 9300 ◊	19874 9200 ◊
◊ B / FBR / FG / W	



0,5 IP20

REQUIREMENTS

LED POWER SUPPLY ► all info on deltalight.com

OPTIONS

MOUNTING KIT FLUSH SPY ► **414 90 01** (for spy focus CLIP)

COVERSET R ◊ (Ø 90) ► **204 00 90** ANO / B / W (for spy focus ON)


COVERSET R ◊ (Ø100) ► **204 00 100** ANO / B / W (for spy focus ON)





ADJUSTABLE BEAM

SPY FOCUS


SPY FOCUS LP ADM




NON DIM	
3000K / CRI>90 LED 9W / 1076lm / 500mA	2700K / CRI>90 LED 9W / 1067lm / 500mA
8-43°	
19879 9300 ◊	19879 9200 ◊
◊ = B / W	
220-240V / 50-60Hz	
◊ [0,7] IP20	





DALI DIM	
3000K / CRI>90 LED 9W / 1076lm / 500mA	2700K / CRI>90 LED 9W / 1067lm / 500mA
8-43°	
19879 9305 ◊	19879 9205 ◊
◊ = B / W	
220-240V / 50-60Hz	
◊ [0,7] IP20	




SPY FOCUS MP ADM




NON DIM	
3000K / CRI>90 LED 17.1W / 2125lm / 500mA	2700K / CRI>90 LED 17.1W / 2068lm / 500mA
12-45°	
19875 9300 ◊	19875 9200 ◊
◊ = B / W	
220-240V / 50-60Hz	
◊ [0,7] IP20	



DALI DIM	
3000K / CRI>90 LED 17.1W / 2125lm / 500mA	2700K / CRI>90 LED 17.1W / 2068lm / 500mA
12-45°	
19875 9305 ◊	19875 9205 ◊
◊ = B / W	
220-240V / 50-60Hz	
◊ [0,7] IP20	



MAXISPY DYNAMIC FOCUS ADM WD



WIRELESS DIM + WIRELESS FOCUS ADJUSTMENT	
3000K / CRI>90 LED 17W / 1500lm	
15-50°	
19880 930W ◊	
◊ = B / W	
220-240V / 50-60Hz	
◊ [1,4] IP20	

