

AXOR Starck

Electronic basin mixer with temperature pre-adjustment battery-operated


Surfaces: **Chrome** Article Number: **10106000**



product features

- ComfortZone 90
- projection 103 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- temperature pre-adjustable
- suitable for continuous flow water heaters
- infrared sensor technology
- automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared sensor (2 settings)
- battery operation 6V (lifetime approx. 2 years, battery included in scope of supply)
- hygiene rinse activatable (automatic water flow)
- frequency of hygiene rinse: 24 h
- flushing time hygiene rinse: 10 s
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- cleaning mode: manual water stop for washbasin cleaning
- connection dimension: DN15
- TÜV certified
- dirt filters in the connection hoses

Technology

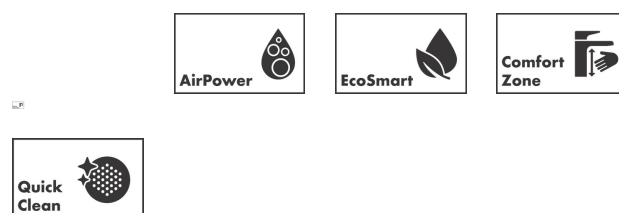


AXOR Starck
Electronic basin mixer with temperature pre-adjustment battery-operated
 Surfaces: **Chrome** Article Number: **10106000**




Product image



Scale drawing

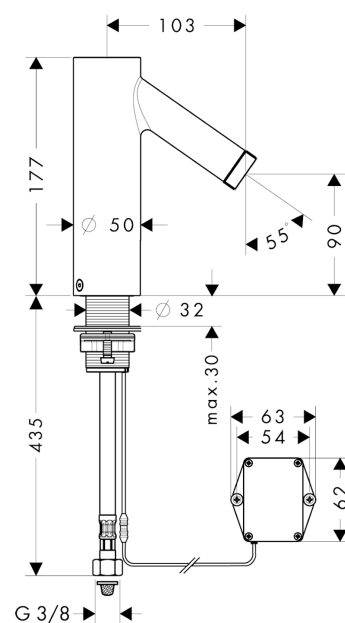

Flowchart

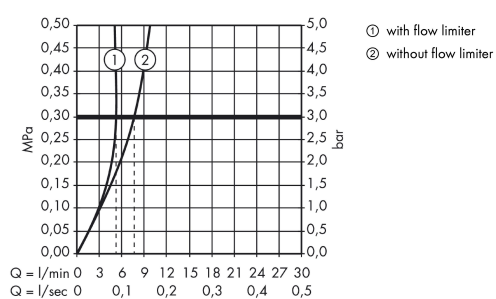

AXOR Starck

Electronic basin mixer with temperature pre-adjustment battery-operated

Surfaces: **Chrome** Article Number: **10106000**



Spare part list

Year of production: >02/16

Pos.		Article Number	Price	PU
1	mixer-hood	92302000	-	1
2	aerator M24x1 (5 l/min)	95379000	-	1
3	O-ring 17x2	98199000	-	1
4	solenoid valve	95654000	-	1
5	O-ring 31x2	98204000	-	1
6	O-ring 41x2	98212000	-	1
7	O-ring 6x2	98458000	-	1
8	O-ring 5x2	98215000	-	1
9	electronics	92346000	-	1
10	battery box	98801000	-	1
11	battery CR-P2 / 6V lithium	97399000	-	1
12	flat seal	98749000	-	1
13	fixing set (Ø 32)	13961000	-	1
14	lever collar	97548000	-	1
15	connection hose 450 mm M8x0,75 G3/8	98809000	-	1
16	O-ring 7x1,5	98422000	-	1
17	back flow preventor cartridge with microfilter	92297000	-	1
18	non return valve DW 10	96456000	-	1
19	screw	93272000	-	1
a	fixation extension 35 mm	13898000	-	1