

# LINESCAPES PENDANT VERTICAL

Family of floor, ceiling and wall elements, efficient with an highly versatile linear luminous output. Body in aluminium extruded and opal white polycarbonate diffuser. Horizontal cantilever wall version supplied with kit for connection with remote driver. White or black finishing with elements in grey painted on the floor and wall versions.



# LED 2700K

## LAMPING

Source	linear LED
Total power	12W
Emission	diffused orientable
Tension	110/240V
Color temperature	2700K
Luminous flux	475lm
Typ CRI	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	cable length max 3m, orientable 360°, side emission

## Codes

LIN LW2 59

## Structure/Diffuser


white/white

## PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

## Certificazioni

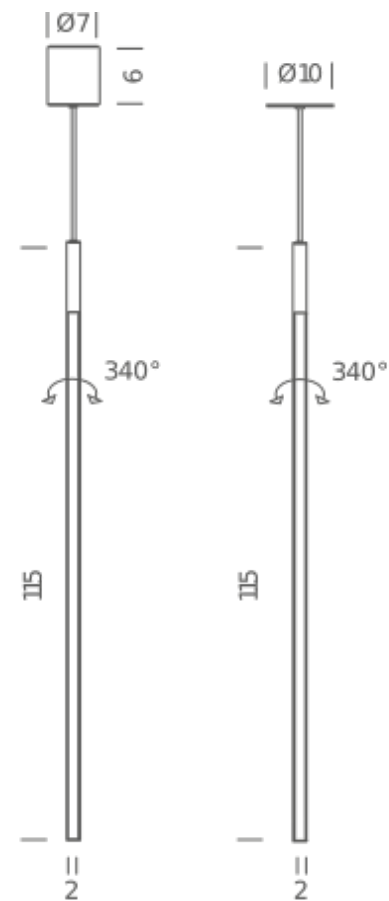

## LED 3000K

---

### LAMPING

Source	linear LED
Total power	12W
Emission	diffused orientable
Tension	110/240V
Color temperature	3000K
Luminous flux	475lm
Typ CRI	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	cable length max 3m, orientable 360°, side emission

### Codes

LIN LWW 59

### Structure/Diffuser


white/white

### PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

### Certificazioni

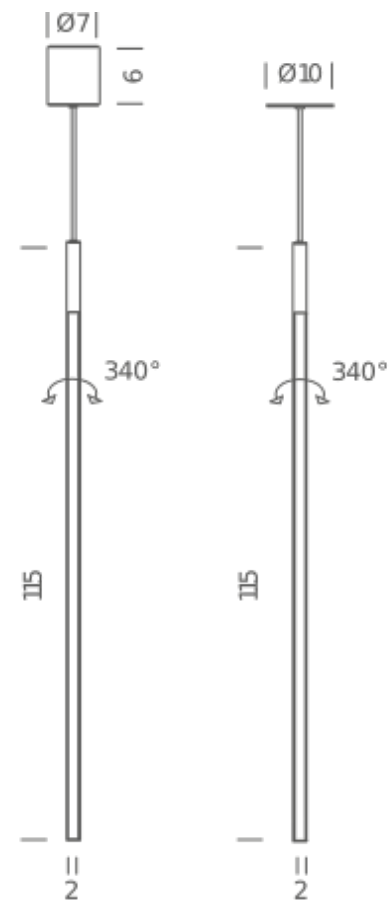

# LED RECESSED 2700K

## LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable
Switching	dimmable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1125lm
Typ CRI	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	cable length max 3m, orientable 360°, recessed hole Ø8xHmin 4cm, side emission, DALI version on request

## Codes

LIN LW2 5A

## Structure/Diffuser


white/white

## PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

## Certificazioni

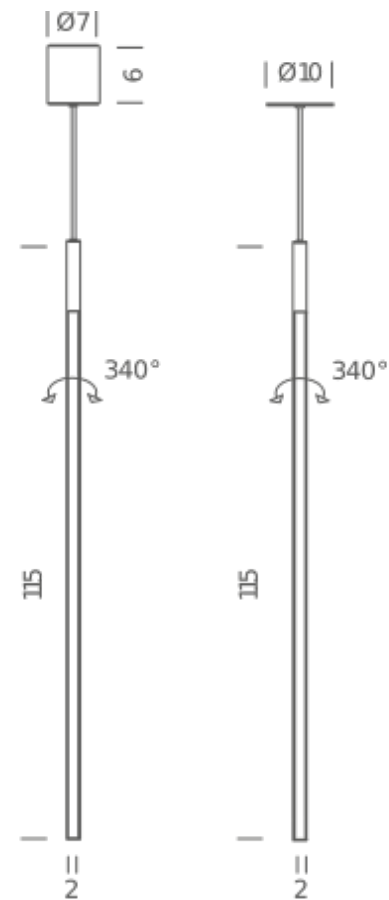

## LED RECESSED 3000K

### LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1125lm
Typ CRI	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	cable length max 3m, orientable 360°, recessed hole Ø8xHmin 4cm, side emission, DALI version on request

### Codes

LIN LWW 5A

### Structure/Diffuser

white/white

### PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

### Certificazioni

