




Freestanding bathtub in Exmar, narrow edge AVAS1041Z\_

Benedini Associati, 2009

Exmar free-standing bathtub with round interior.



Bathtub with round interior in white Exmar or two colourd (exterior in dark grey RAL7021 or light grey RAL7044) with narrow and overflow. Use of the .MET0477L waste with siphon is obligatory. The taps can be mounted on the wall or floor. For open bathtubs use the .MET0434 waste. For an easier installation of the bathtubs we recommend to use the template for the positioning of the waste trap AKITPZVAS.

Height:	60 cm	23" 5/8 inches	
Diameter:	130 cm	51" 1/8 inches	
Weight:	132 kg	291 lbs	
Capacity:	520 I	137 gal	
Packaging:	143 x 143 x 68 cm	56" 2/8 x 56" 2/8 x 26" 6/8 inches	
Total weight:	231 kg	509 lbs	

### **Finishes**



White



White/dark grey



White/light grey

#### **Materials**




Exmar


**www.agapedesign.it** Agape srl © 2022 — Page 1






### Main dimensions













**Dimensions for recess** 







### **Dimensions for wall mounted taps**

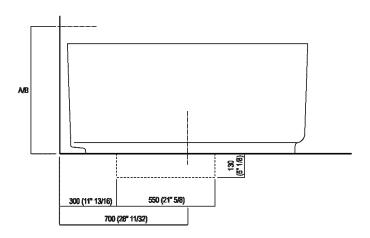


		A*	B**
FEZ 2	(AFEZ027)	750 (29" 17/32)	-
FEZ	(ARUB050000L, ARUB051000L, ARUB150000C,	750 (29" 17/32)	-
	ARUB151000C, ARUB190000C, ARUB191000C)		
MEMORY	(AMEM342, AMEM324, AMEM343, ARUB1077S,		
	ARUB1040S)	750 (29" 17/32)	-
SQUARE	(ARUB1117, ARUB1118, ARUB0932N, ARUB0933N)	-	700 (27"9/16)
SEN	(ASEN0912V)	-	700 (27*9/16)

inserasse gruppo / axial distance for tap
filo inferiore gruppo / Tap's lower edge





## **Dimensions for freestanding spouts**

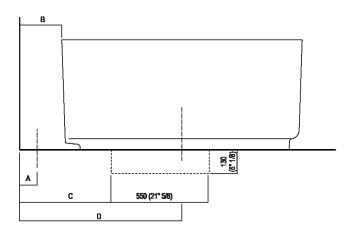


		A	В	С	D
FEZ2	(ARUB140, ARUB141, AFE026)	80 (3"1/8)	188 (7"13/32)	435 (17" 1/8)	835 (32" 7/8)
FEZ	(ARUB145, ARUB170)	80 (3"1/8)	188 (7"13/32)	435 (17" 1/8)	835 (32" 7/8)
MEMORY	(AMEM327, AMEM325, ARUB1078,	80 (3"1/8)	188 (7"13/32)	435 (17" 1/8)	835 (32" 7/8)
	ARUB1072, ARUB1033)				
SQUARE	(ARUB1112, ARUB1115, ARUB0961L,	80 (3"1/8)	188 (7"13/32)	435 (17" 1/8)	835 (32" 7/8)
	ARUB0934L, ARUB0935NL, ARUB0936NL,				
	ARUB0952L)				
SEN	(ASEN0911, ASEN0977)	80 (3"1/8)	170 (6"11/16)	417 (16" 27/64)	817 (32" 11 <i>[</i> 64)





Note

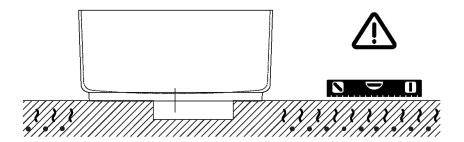

La vasca deve essere installata su un pavimento perfettamente piano. The bathtub must be positioned on a flat floor surface.

E' necessario predisporre a pavimento un pozzetto. It is necessary to prepare a recess in the floor.

Evitare di realizzare impianti di riscaldamento nell'area sottostante la vasca. Avoid the installation of floor heating plants in the area under the bathtub.