

LOGIC



43 x 85



43 x 70



43 x 85



43 x 70

LOGIC 40



R

R A

R MOON

R A MOON

3000K CRI>90	LED [E] 3.9W / 385lm / 350mA	IP67	15°	13955 9310 ◊	13957 9310 ◊	13956 9310 ◊	13958 9310 ◊
				◊ ANO ●	◊ INOX	◊ ANO ●	◊ INOX

INCL. 1 x MICRO VISOR

INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 6mm



61 x 100



61 x 100



61 x 100



61 x 100



61 x 100

LOGIC 60



R

R A

R WALLWASH

R MOON

R A MOON

3000K CRI>80	LED [F] 2W / 229lm / 700mA LED [F] 3.2W / 319lm / 1050mA	IP67	6°	213 45 15 ◊	213 46 15 ◊			
	LED 2W / 229lm / 24V-DC (PWM)			13959 8310 ◊	13961 8310 ◊			
	LED 4W / 335lm / 24V-DC (PWM)	WALLWASH			213 45 212 ◊			
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP67	20°	213 45 811 932 ◊	213 46 811 932 ◊		213 45 10 811 932 ◊	213 46 10 811 932 ◊
	LED 7.1W / 812lm / 24V-DC (NON DIM)					13963 9320 ◊	13964 9320 ◊	
	LED 7.1W / 812lm / 24V-DC (PWM)			13960 9320 ◊	13962 9320 ◊			

◊ ANO ●

◊ ANO ● / ◊ B ● (BLACK ANODISED)

◊ ANO ●

◊ ANO ●

◊ ANO ● / ◊ B ● (BLACK ANODISED)


INCL. 1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm



93 x 125



93 x 125



112 x 112 x 125



93 x 125



93 x 125

LOGIC 90



R

R A

S

R WALLWASH

R A WALLWASH

3000K CRI>90	LED 7.1W / 812lm / 350mA	IP67	11°	213 47 811 931 ◊	213 48 811 931 ◊	213 49 811 931 ◊		
			30°	213 47 811 932 ◊	213 48 811 932 ◊	213 49 811 932 ◊		
			55°	213 47 811 933 ◊	213 48 811 933 ◊	213 49 811 933 ◊		
			WALLWASH				213 473 811 930 ◊	213 483 811 930 ◊
			WW + SBL				213 474 811 930 ◊	213 484 811 930 ◊
	LED 7.1W / 812lm / 24V-DC (PWM)	11°	13965 9310 ◊	13966 9310 ◊	13967 9310 ◊			
		30°	13965 9320 ◊	13966 9320 ◊	13967 9320 ◊			
		55°	13965 9330 ◊	13966 9330 ◊	13967 9330 ◊			
		WALLWASH				13968 9300 ◊	13970 9300 ◊	
		WW + SBL				13969 9300 ◊	13971 9300 ◊	

◊ ANO ●

◊ ANO ● / ◊ B ● (BLACK ANODISED)

◊ ANO ●

◊ ANO ●

◊ ANO ● / ◊ B ● (BLACK ANODISED)

INCL. CABLE H05 RN-F 2 x 1mm² 0,5m + IP68 CONNECTOR 3P (not for 24V-DC versions)
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm
100-240V / 50-60Hz (not for 24V-DC versions)





FIND ME ONLINE



LOGIC 40




The Logic range stands for a complete family of water and shock resistant lighting fixtures. Logic 40 is the smallest of the family, a minimalistic recessed uplight with a diameter of only 40mm. With its small beam angle of 15°, it perfectly serves as an accent light to highlight any architectural aspect you want. Available with trim or as a trimless installation for an even more minimalistic look. To take care of the visual well-being, Logic 40 either comes with a micro vizer inside or as a Moon version, shielding off the light that is thrown backwards. The perfect addition to accentuate green or sculptures, to highlight façade or small garden features, to create a sense of depth or indicate the right direction along paths and driveways.

LOGIC 60

With a diameter of only 60mm, Logic 60 can easily be integrated in any landscape design, without disturbing the visual perception of it. Its smallest beam angle is ideal for highlighting, while the wallwash versions emphasize façades and bring depth into the architecture. The specific Moon version cuts the light spill going backwards, ideal to accentuate trees or reduce the glare for passers-by.

LOGIC 90

The bigger version of Logic allows for more choice in beam angles, letting the designer be creative and play with light effect and light intensity. Similar to Logic 60 also wallwash versions are available within the bigger range to offer multiple light effects within the same design language.

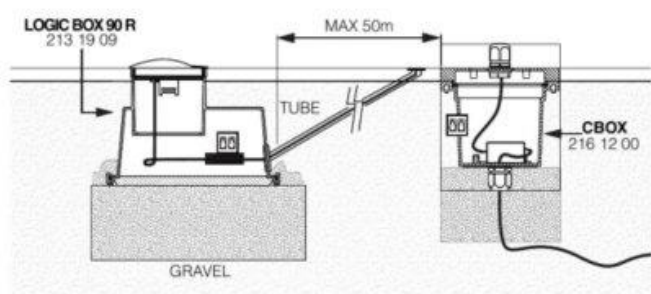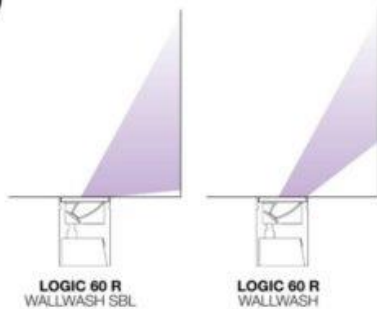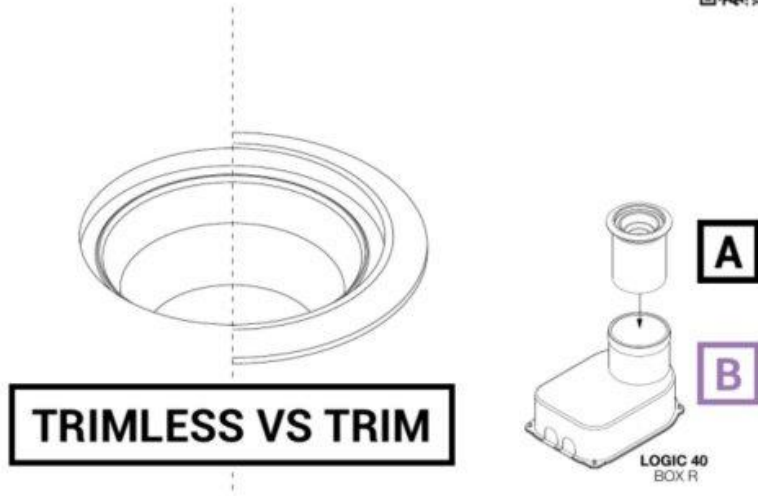

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

LOGIC 40		LOGIC 60				LOGIC 90							
R	R A	R MOON	R A MOON	R	R A	R A WALLWASH	R MOON	R A MOON	R	R A	S	R WALLWASH	R A WALLWASH
				mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC

LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

NON DIM - 24W	21012 0160	137 x 50 x 16																
1-10V DIM - 60W (PWM)	21012 0101	150 x 53 x 35							R*	R*				R*	R*	R*	R*	R*
DALI DIM - 60W (PWM)	21012 0135	150 x 53 x 35							R*	R*				R*	R*	R*	R*	R*

LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT

MAINS DIM (FE) 11	21012 0298	ⓘ min. 55	R*	R*	R*	R*													
1-10V DIM 16	300 90 63	ⓘ min. 84	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*
DALI DIM 16	300 90 63	ⓘ min. 84	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*	R*

INSTALLATION

CBOX	216 12 00		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
LOGIC 40 BOX R	13910 0010		O	O	O	O													
LOGIC 60 BOX R	213 19 10						O	O	O	O	O	O	O						
LOGIC 90 BOX R	213 19 09													O	O	O	O	O	O
LOGIC 90 BOX S	213 19 08																O	O	
IP68 CONNECTION KIT	216 12 01		O	O	O	O	O	O	O	O	O	O	O						
IP68 CONNECTOR 3P	216 12 02		O	O	O	O	O	O	O	O	O	O	O						


* REMOTE INSTALLATION

LOGIC


LOGIC F

Logic F creates a playful effect on your path or driveway, perfect to enhance the architectural character of your project and landscape.


IP67

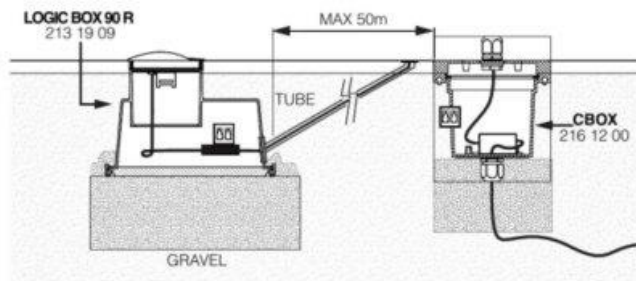

A



93 x 40



93 x 40















detailight.com/logic

LOGIC		F1	F2
3000K / CRI>80	LED 0,6W / 40lm / 24V-DC	213 47 112 ◊	213 47 122 ◊
	2 x LED 0,6W / 40lm / 24V-DC		

◊ A ●
max.600kg



FIND ME ONLINE



EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

				LOGIC	
				F1	F2
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
NON DIM - 24W	21012 0160	137 x 50 x 16		R*	R*
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
INSTALLATION					
CBOX	216 12 00			<input type="checkbox"/>	<input type="checkbox"/>
LOGIC 90 BOX R	213 19 09			<input type="checkbox"/>	<input type="checkbox"/>

*REMOTE INSTALLATION

