

NORMA

Mario Barbaglia

LED and halogen wall lamps with widespread light. Tube diffuser in sandblasted Pyrex or in opal metacrylate (LED), mounted on a glossy polished aluminium structure.



25 HALO

LAMPING

Source	R7s (114mm)
Total power	250W
Emission	diffused
Switching	dimmable
Tension	230V
Typ CRI	85
IP class	40
Materials	glass + aluminium
Notes	horizontal mounting only, GLASS diffuser (pyrex)
Net lamp weight	1,8 kg

Codes

NOR HLW 31

Structure/Diffuser


chrome/white (pyrex)

PACKAGE

Package 01 Dimension: 37x36x14 cm / Gross weight: 2,5 kg

Certificazioni

CE ENEC IP40

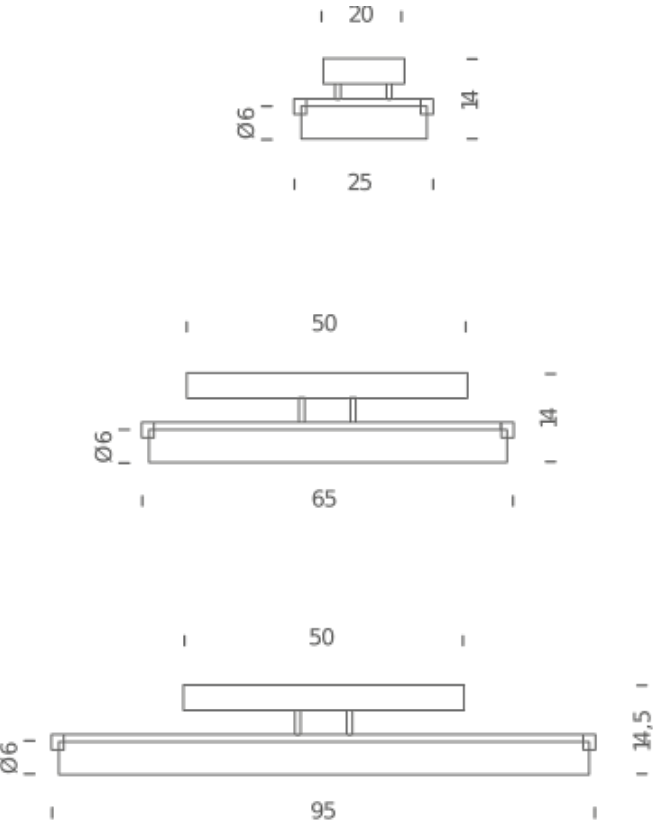

25 LED

LAMPING

Source	LED board
Total power	20W
Emission	diffused
Tension	110/230V
Color temperature	3000K
Luminous flux	1800lm (source luminous flux)
Typ CRI	85
Energy class	A+
IP class	40
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting, PMMA diffuser, double insulation only for version 25
Net lamp weight	1,8 kg

Codes

NOR LLW 35

Structure/Diffuser


chrome/white (PMMA)

PACKAGE

Package 01

Dimension: 37x36x14 cm / Gross weight: 2,5 kg

Certificazioni

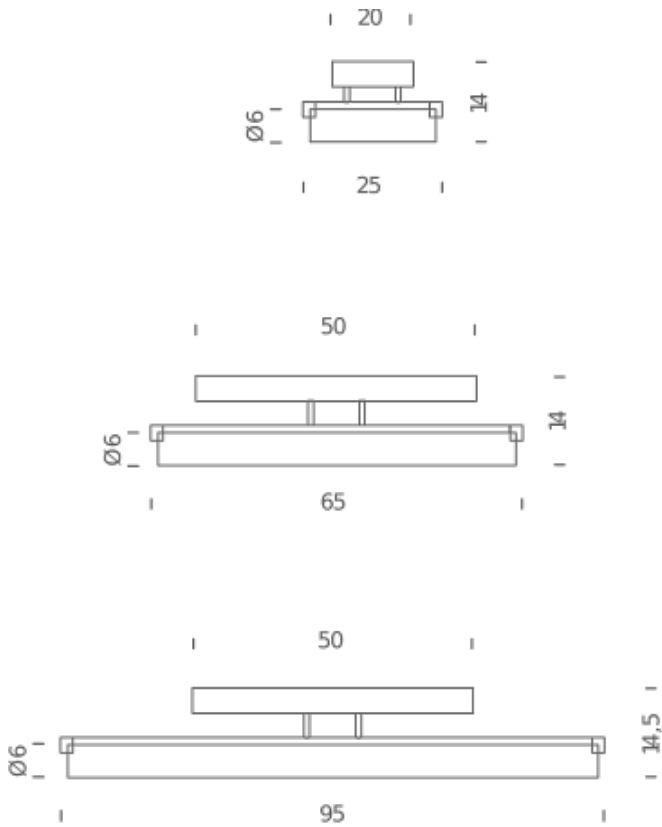

65 LED

LAMPING

Source	LED board
Total power	17,5W
Emission	diffused
Switching	dimmable, DALI push
Tension	220/240V
Color temperature	3000K
Luminous flux	1444lm (source luminous flux)
Typ CRI	85
Energy class	A+
IP class	40
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting, PMMA diffuser, double insulation only for version 25
Net lamp weight	3 kg

Codes

NOR LLW 32

Structure/Diffuser


chrome/white (PMMA)

PACKAGE

Package 01

Dimension: 35x75x15 cm / Gross weight: 4 kg

Certificazioni

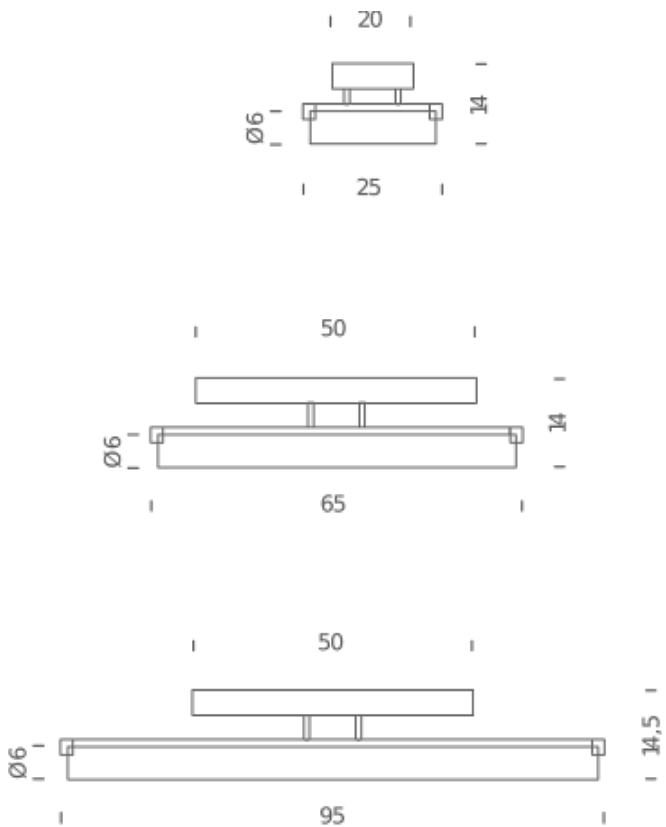

95 LED

LAMPING

Source	LED board
Total power	27W
Emission	diffused
Switching	1-10V/push
Tension	220V
Color temperature	3000K
Luminous flux	2400lm (source luminous flux)
Typ CRI	85
Energy class	A+
IP class	40
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting
Net lamp weight	5 kg

Codes

NOR LLW 33

Structure/Diffuser

chrome/white (PMMA)

PACKAGE

Package 01

Dimension: 35x110x15 cm / Gross weight: 6 kg

Certificazioni

CE ENEC IP40

