

PUNK

Design by **OMA** & Delta Light

Step away from brave, alter yourself and dare to dare. This spiked design family breathes creativity and allows you to play with light and texture. To integrate the Punk experience throughout your project, the Punk design is available as a Clip version, as pendants, wall luminaires and in the XY180 range. Available in Black, Gold Coloured and Black Pure, a Black coloured finish with pure aluminum topped spikes.

Don't be deceived: Punk Clip may look small with its diameter of only 39mm, its performance is big! The Clip system lets you install Punk as a semi-recessed light, only letting the luminaire head peeking out of the ceiling. With its particular design, the pendant versions of Punk make a statement on their own, but hanging them in a cluster make them look like a real eye-catcher. Combining different Punk lengths and different finishing colours makes a unique setting out of every Punk cluster.

deltalight.com/punk

Beat the **NORMAL**

1/1



0-90°/355°

51 x 40

PUNK

39 CLIP

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20	45°
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA		

471 111 811 931 ◊

471 111 811 921 ◊

◊ B-B ●●



A



PUNK

451 C

452 C

3000K CRI>90	LED 6.4W / 587lm / 350mA	MAINS	40°
2700K CRI>90	LED 6.4W / 587lm / 350mA		

471 221 932 ED8 ◊

471 222 932 ED8 ◊

471 221 922 ED8 ◊

471 222 922 ED8 ◊

◊ B ● / BP ● / GC ●

◊ B ● / GC ●

220-240V / 50-60Hz

INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

IP20



PUNK

621 C

621 C Hi

622 C

622 C Hi

3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	MAINS	33°
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA		

471 321 811 932 ED8 ◊

471 322 811 932 ED8 ◊

471 321 811 922 ED8 ◊

471 322 811 922 ED8 ◊

471 321 00 ◊

471 322 00 ◊

◊ B ● / BP / GC ●

◊ B ● / GC ●

220-240V / 50-60Hz

QPAS51 GU10 / 100-240V / 50-60Hz


INCL. 1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

IP20

IP20 (0.5)

IP20

IP20 (0.5)

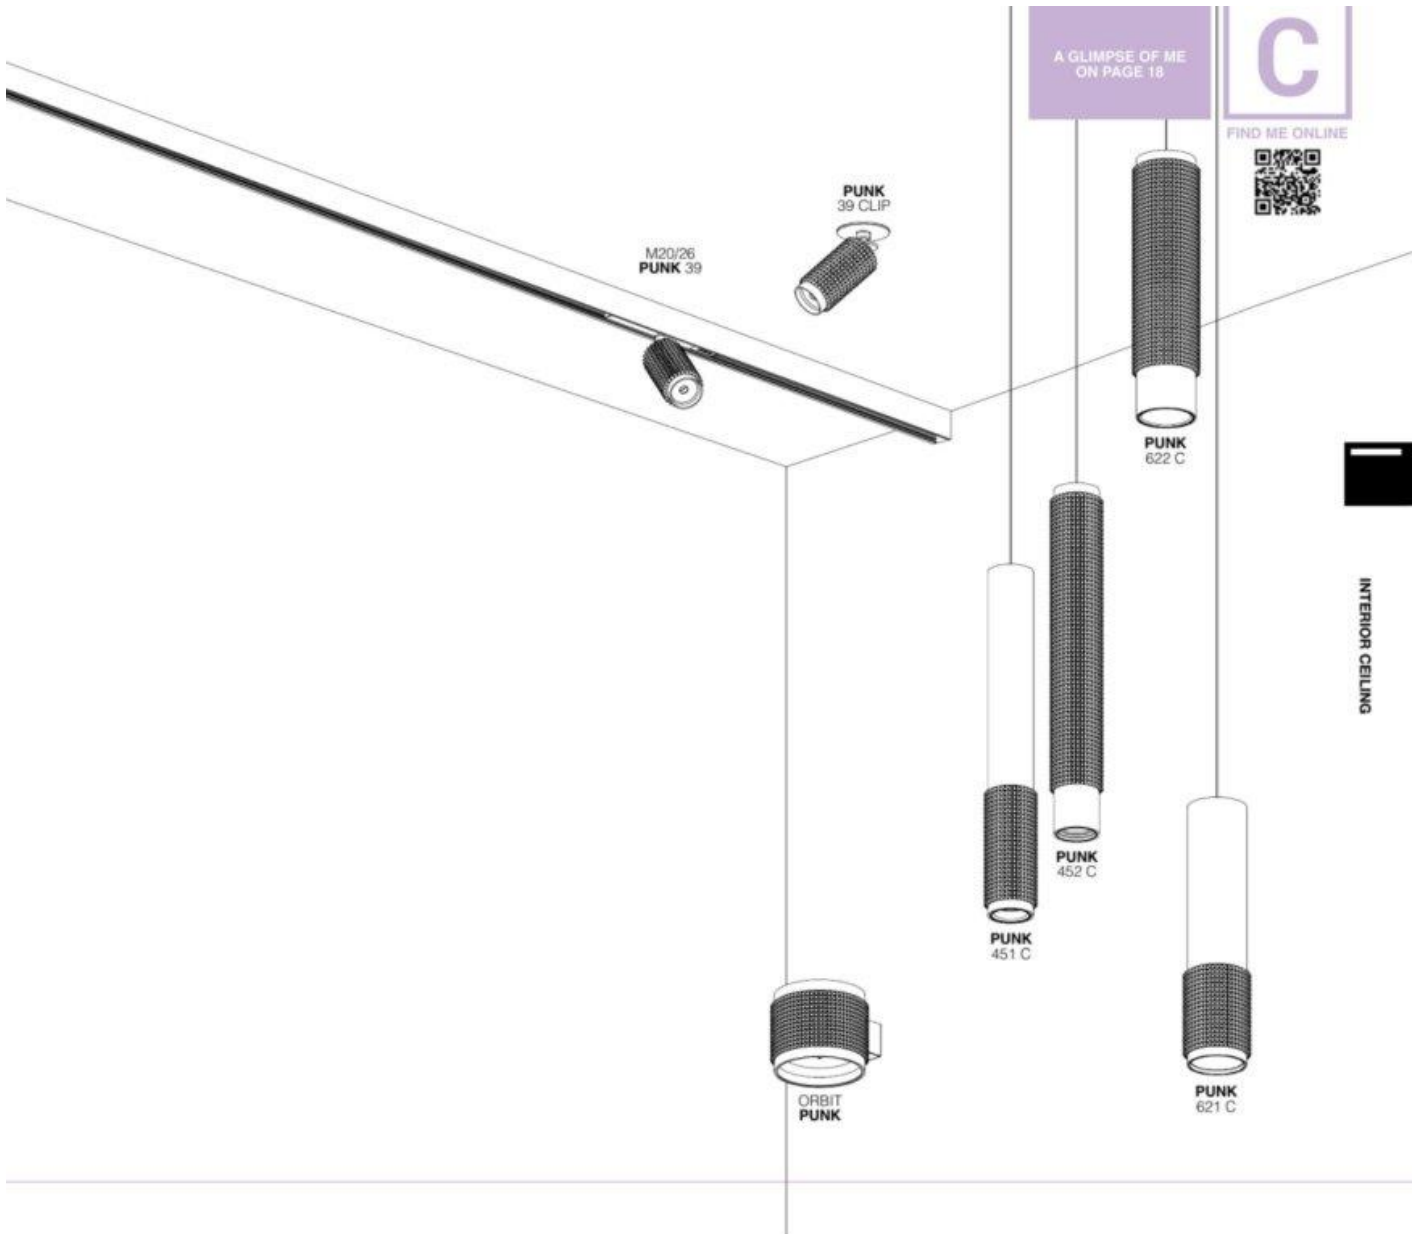

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			PUNK						
			39 CLIP	451 C	452 C	621 C	621 C HI	622 C	622 C HI
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
MAINS DIM (FE)	11	21012 0298	min. 55	R *					
1-10V DIM	15	300 90 124	min. 55	R *					
DALI DIM	14	300 90 125	min. 55	R *					
FINISH									
SPY TUBE	414 01 00	B/FBR/FG/MMAT/SG/W				R		R	
MIDISPY TUBE	414 03 00	B/FBR/FG/MMAT/SG/W		R	R				
MOUNTING KIT									
MOUNTING KIT FLUSH SPY	414 90 01		O						
INSTALLATION									
SUSPENSION + CONNECTION TRIMLESS	328 10 02			O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W			O	O	O	O	O	O
HONEYCOMB / LENS / GLASS									
HONEYCOMB	413 03 01	B				A		A	
LINEAR SPREAD LENS	413 03 02					A		A	
SPREAD LENS	413 03 03					A		A	
SOFTENING LENS	413 03 04					A		A	
GLASS SBL	413 03 05					A		A	
LED LAMP MORE INFO TECHNICAL CHAPTER									
							O		O

*REMOTE INSTALLATION